

EN

PRODUCT CATALOG

1.6.2026

CONTACT DETAILS - ORDERS AND DELIVERIES

Regions 1-3

Hyvinkää factory

Hikiäntie 1336, 05820 HYVINKÄÄ

Tel. +358 20 789 5911

tilaukset@fescon.fi

Region 4

Oulu factory

Topinperäntie 102, 90820 KELLO

Tel. +358 8 563 4440

haukipudas.tilaukset@fescon.fi

Bulk sand orders

Raahe factory

Kalkankatu 6, 92150 RAAHE

Tel. +358 20 789 5930

hiekkatilaukset@fescon.fi

Harjavalta factory

Hiisikuja, 29200 HARJAVALTA

Tel. +358 20 789 5930

hiekkatilaukset@fescon.fi

Hyvinkää factory

Hikiäntie 1336, 05820 HYVINKÄÄ

Tel. +358 20 789 5930

hiekkatilaukset@fescon.fi


Nanten floor coatings

Tuusula factory

Teollisuustie 6, 04300 TUUSULA

Tel. +358 9 274 7970

nanten@fescon.fi

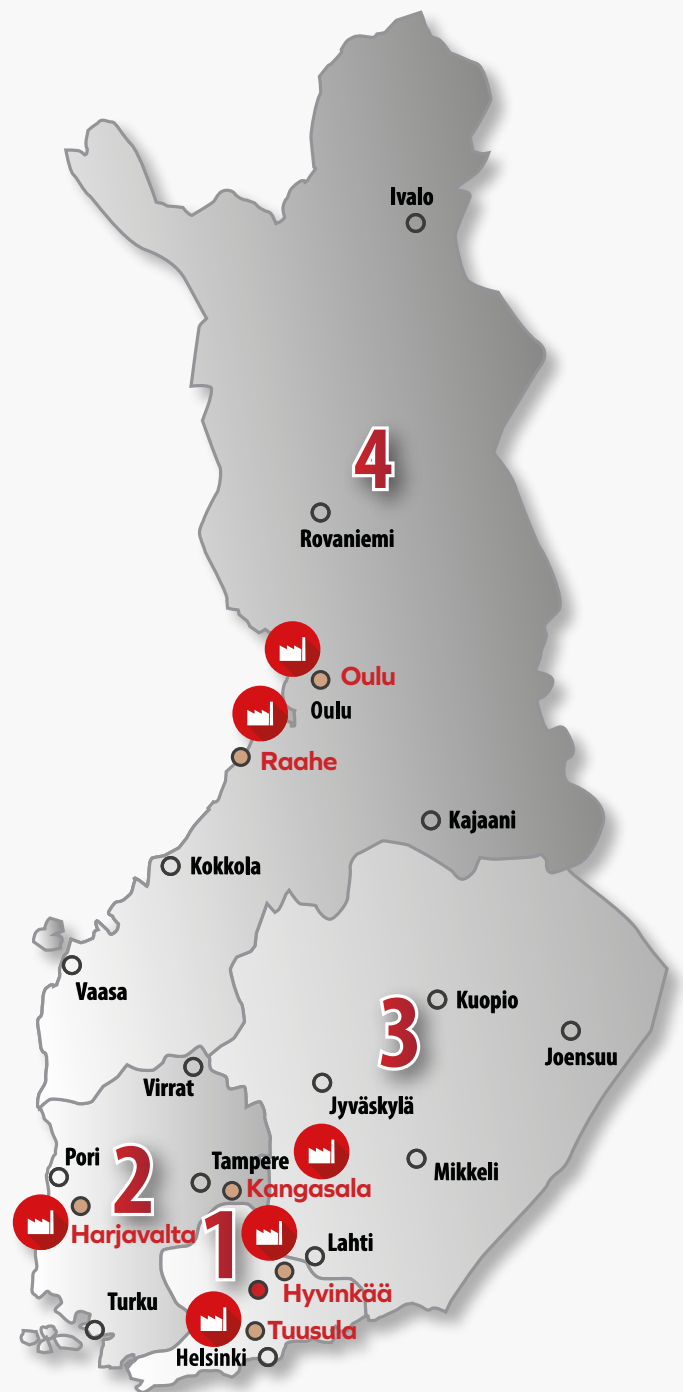

Fintex paints, adhesives and joint sealants

Kangasala factory

Mäkirinteentie 13, 36220 KANGASALA

Tel. 020 785 1210

fintex@fintex.fi

CONTACT DETAILS – SALES

Sales - region 1

PLASTER BUSINESS

Hardware sales

Jori Leskinen Tel. +358 40 301 6053

Project sales of façade products and concrete repair products

Timo Lehtimaa Tel. +358 40 301 6024

Levelling and tiling products, contractor sales

Mikko Rahkala Tel. +358 40 301 6042

Masonry mortars, dry concrete, construction company sales

Jarkko Paljakka tel. +358 40 301 6027

Masonry mortars, dry concrete, construction company sales

Janette Niskala Tel. +358 40 301 6054

NANTEN FLOOR COATINGS

Project sales

Architects and designers

Janne Häyrynen Tel. +358 50 439 4499

Project sales

Tomi Pennanen Tel. +358 50 374 4388

Sales - region 2

ALL FESCON PRODUCTS

Sakari Kaukonen Tel. +358 40 301 6030

NANTEN FLOOR COATINGS

Project sales

Architects and designers

Joonas Viman Tel. +358 40 902 23211

Project sales

Architects and designers

Tampere Region

Pasi Heinonen Tel. +358 50 431 8267

Sales -region 3

ALL FESCON PRODUCTS

Elina Vuori Tel. +358 40 831 1358

NANTEN FLOOR COATINGS

Project sales

Architects and designers

Central and Eastern Finland

Pasi Heinonen Tel. +358 50 431 8267

Sales - region 4

ALL FESCON PRODUCTS

Kai Saastamoinen Tel. +358 40 301 6019

FESCON FILLER AND TILE PRODUC

Ostrobothnia

Markku Latvanen Tel. +358 40 301 6061

NANTEN FLOOR COATINGS

Project sales

Architects and designers

Kimmo Väänänen Tel. +358 44 744

Sales - Throughout Finland

PUMPABLE FLOOR LEVELLING PRODUCTS, DRY HARDENERS AND HARD CONCRETE

Juha Pirhonen Tel. +358 40 301 6057

FAÇADE SOLUTIONS, INDUSTRIAL CLIENTS AND DESIGNERS

Mikko Syrjänen Tel. +358 400 178 897

SANDS, BLASTING AND POWER PLANT MATERIAL

Eero Majanen Tel. +358 40 506 9021

POWER PLANT MATERIALS AND TECHNOLOGY SERVICES

Tapio Klasila Tel. +358 40 150 8035

SANDS, BLASTING AND SPORTS FIELD MATERIALS

Tomi Koota Tel. +358 40 128 1883

FESCON-PLASTER PRODUCTS

Tel. +358 20 789 5901

NANTEN-FLOOR COATINGS

Tel. +358 9 274 7970

SAND PRODUCTS

Tomi Koota Tel. +358 40 128 1883

POWER PLANT MATERIALS AND
TECHNOLOGY SERVICES

Tapio Klasila Tel. +358 40 150 8035

FINTEX PAINTS, ADHESIVES AND
JOINT SEALANTS

Tel. +358 20 785 1210



NANTEN FLOOR COATINGS



DECOFLOOR COMFORT PLUS

The matte and elastic Nanten Decofloor Comfort Plus is an excellent choice for public construction projects, from care homes and hospital rooms to schools and daycare centres. With hundreds of colour options available, you can choose the most suitable shade for your project either from Nanten's own colour chart or the RAL colour chart. Nanten Decofloor Comfort Plus is available in -3 dB, -11 dB and -16 dB versions.

BENEFITS

- Enhances walking comfort
- Reduces impact sound
- Aesthetic and elastic
- Seamless and hygienic
- Helps maintain good indoor air quality
- Matte finish, surface can be decorated with colour flakes
- Wide range of colours
- Resistant to wear and chemicals

APPLICATIONS

- Schools
- Daycare centres
- Hospitals
- Assisted living facilities
- Offices and public spaces





GOOD THERMAL
INSULATION

ECOLOGICAL

BREATHABLE

EASY TO WORK WITH
AND INSTALL

SILICATE BOARD SKL

A BREATHABLE SOLUTION FOR HEALTHY STRUCTURES

The silicate board is a modern and ecological choice for interior insulation of buildings. It is highly suitable for mineral-based structures – such as concrete, lightweight concrete (Siporex), block and brick walls, as well as structures in contact with the ground and ceiling surfaces.

SILICATE BOARD SKL

- Material consumption: approx. 4.3 boards/m²
 - Density: approx. 110 kg/m³
 - Reaction to fire: A1 EN13501-1:2007+A1:2009
 - Thermal conductivity: D23/50 = 0.043 W/(mK), design = 0.045 W/(mK)
 - pH: 10–11
 - Water vapour permeability: $\mu = 3$
- 



NEW PRODUCT!

Stone joint grout KSL black grey

For jointing slate, concrete slabs
and natural stones

- Maximum grain size: 1.2 mm
- Compressive strength: 25 MPa
- For joint widths: 5–30 mm



Fintex TetraStop

FINTEX PAINTS,
ADHESIVES AND
JOINT SEALANTS

Fintex TetraStop is an antimicrobial wall coating system designed for spaces where hygiene is of utmost importance.

The coating effectively combats mould and bacteria, helping to maintain a healthy and safe environment in hospitals, care homes, schools and residential properties. Its durable and pleasant surface protects structures and keeps spaces clean day after day.



Fescon Oy general delivery terms and conditions 1.6.2026

SCOPE These terms and conditions apply to the domestic trade of products in the Fescon price list and those made to order. To the extent that the trade-related issues have not been otherwise agreed in these terms of delivery or separately, the general procurement and delivery terms for construction products (RYHT) shall be respected.

PRICE AND INVOICING Invoicing is done on the date of delivery at the valid price excluding tax. Value-added tax will be added to the product prices. Fescon Oy reserves the right to introduce a possible energy surcharge if energy costs increase significantly after the publication of the price list. If the payment of the invoice is made to the seller's designated account after the due date, the seller has the right to charge interest on late payments in accordance with the Interest Act. A delay in payment entitles the seller to suspend deliveries at its discretion. The buyer is obliged to pay any reminder and collection costs arising from the delay in payment.

TERM OF DELIVERY Free carrier at the factory indicated in the price list (FCA, Finnterms 2001). Transport arranged by Fescon Oy will be charged according to the freight calculator and terms available on the website www.fescon.fi. Sand deliveries under a separate agreement either FCA or DAP (Finnterms 2001). Pick-up of Nanten products according to a separate agreement.

PRODUCTS MADE TO ORDER Orders for special products and products made to order are binding on the buyer. The buyer is obliged to receive and pay for the products made to order that the buyer has ordered. Fescon is entitled to charge the price and disposal costs of the product from the buyer if the buyer does not receive the products within the schedule indicated in the order confirmation.

TIME OF DELIVERY Products in stock in Hyvinkää and Oulu, delivered either on full pallets or in large bags, can be picked up at the warehouse three (3) hours after placing the order at the customer service centre.

Pick up of products in stock in partially full pallets: Can be picked up from the factory 1 working day after ordering.

Products made to order can be picked up from the factory:

- grey and fireproof products and sand products 10 business days after the order
- coloured products 10 business days after the order
- liquid facade products delivered within 15 business days of placing the order
- Fescoterm silicate boards, plastering materials, and other supplies as agreed

For deliveries arranged by Fescon Oy, the delivery time is 1–5 business days.

Work-site silos are delivered according to separate agreement and terms of delivery. The availability of work-site silos must be ensured on a site-specific basis. The binding delivery and return date of a silo must be communicated and confirmed six weeks before the delivery.

PALLET SIZES AND PRICING The products are packaged on pallets, which are EUR-pallets in size 800 x 1,200 mm. The number of bags per pallet depends on the product and is indicated in the price list. The price is €13.00 per pallet, excl. VAT. The price is valid until further notice. If the delivery method requires a pallet under each large bag, we charge the customer for the pallets in accordance with the currently valid pallet price list. Fescon does not accept pallets or make a refund for any.

ADDITIONAL FEE FOR COLLECTION / INCOMPLETE PALLETS A fee of € 15.00/delivery (VAT 0%) is charged for incomplete pallets and pallets that contain several products. This does not apply to product groups 7, 9–13. Only full pallets are delivered from Harjavalta and Raahen.

COMPLAINTS AND DAMAGES The buyer must inspect the goods delivered to the buyer immediately and report any faults and deficiencies without delay, and at the latest within eight (8) days of receiving them by indicating this in the waybill or using another method in writing. Errors that are noticeable only when using the product must be reported immediately before starting any casting, rendering, masonry or other use of the product. Fescon shall not be liable for any damage caused if the buyer has not made the said claims within the time limit and/or the buyer has taken the product into use contrary to the foregoing.

The buyer must approve the tinted colour model delivered to the work site for the coloured façade products before ordering the actual product. Otherwise, Fescon will not be liable for any errors related to or resulting from the colour.

INSTRUCTIONS Before using the product, consult the product packaging and product specifications for more detailed instructions for use. Detailed product information is available at www.fescon.fi

LIABILITIES OF THE SUPPLIER AND BUYER In addition to what is stated in the RYHT terms, Fescon Oy's liability for the product is limited to the information provided on the product datasheet, and matters excluded from liability comprise the structures, the events during storage and processing, interaction with other products and any conditions with local effect. The buyer must note that the information reported on the product datasheet has been measured under standardised laboratory conditions. The selection of the product and the choices related to the use of the product shall be made project-specifically, taking into account the entire structure. If the product is to be used as part of a Fescon solution or system, the project structure must be formed in accordance with the instructions of the relevant system.

LIMITATION OF LIABILITY Fescon shall not be liable for any consequential or indirect damages caused by a defect of the product or for any damages that are not foreseeable, unless Fescon has acted in a grossly negligent manner. In addition, Fescon's maximum liability to payment of compensation for any direct damages in all situations shall not exceed 500,000 euros, unless Fescon has acted in a grossly negligent manner.

WARRANTY PERIOD Fescon's liability shall be limited to the errors for which the buyer has filed a complaint in writing within two years the delivery of the product. Tools have a warranty period of 12 months, but this does not extend to normal wear and tear.

RETURNS We cannot accept returns.

MARKETING We store the customer's contact information in our customer register for the purpose of managing the customer relationship. The information in the customer register may also be used for marketing purposes. All data is processed confidentially, and customers may opt out of marketing by sending an informal request by email to fescon@fescon.fi, or by unsubscribing via the Unsubscribe from newsletter function.

CHANGES Fescon reserves the right to changes in the price list and the terms of delivery.

DISPUTES Any disputes arising out of the trade, which cannot be settled in mutual negotiations between Fescon and the buyer are to be resolved permanently by a sole-arbitrator arbitration tribunal in accordance with the arbitration rules of the Central Chamber of Commerce. The arbitration procedure is to be held in Finnish and in the jurisdiction of Helsinki. However, without prejudice to the foregoing, Fescon shall have the right to bring an action for claims before a court of general jurisdiction.

Table of contents

1	Dry concretes and cement plasters	11
2	Fireplace mortars	19
3-4	Masonry mortars	21
5	Wall leveling compounds	32
6	Floor leveling products	37
7	Tiling plaster and waterproofing products	43
8	Plasters	52
9	Products for the repair of concrete surfaces and infrastructure construction	56
10	Mineral coatings and thin plaster	62
11	Mineral based facade paints	66
12	Liquid facade and interior paints and coatings	67
13	Fescoterm silicate boards and plastering accessories	73
14	Sands	86
15	Fescotop floor hardeners	95
16	Tools	98
17	Nanten Balcony coatings	99
	Epoxy coatings	102
	Polyurethane coatings, paints and varnishes	108
	Acrylic coatings and primers	111
	Hybrid coatings	116
	Thinners	119
	Primers	121
	Other products	125
	Fill sands	128

1 DRY CONCRETES AND CEMENT PLASTERS

Thin plaster S 06

For the repair and patching of casting defects, and the repair and surface patching of concrete walls and roofs. Maximum grain size 0.6 mm. Ready-to-apply compound 13-14 l/25 kg.



GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841530189	THIN PLASTER S 06 25 KG	53018	25 kg	48 sk	x	-

x = stock product

Cement plaster S 30 C30/37

Suitable for use as underfilling concrete for precast elements, for repairing casting defects and concrete structures, for post-casting, for casting thin surface slabs, and in applications requiring weather and frost resistance. Frost-resistant after hardening. Compressive strength class: C30/37. Layer thickness: 10-70 mm. Maximum aggregate size: 4 mm. Yield: 12-13 litres / 25 kg.



GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841530202	CEMENT PLASTER S 30 C30/37 25 KG	53020	25 kg	48 sk	x	x
6416841330208	CEMENT PLASTER S 30 C30/37 1000 KG	33020	1000 kg		x	x

x = stock product



Winter concrete TB S 30 C30/37 ❄️

Special concrete for grouting and concrete work. Frost-resistant Largest grain size 3 mm. Strength class C 30/37. Ready-to-apply compound ca. 500 l/1000 kg. Working temperature -15°C...+5°C.

GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841530042	WINTER CONCRETE TB S 30 C30/37 25 KG	53004	25 kg	48 sk	x	x
6416841330048	WINTER CONCRETE TB S 30 C30/37 1000 KG	33004	1000 kg		x	x

x = stock product

Corro concrete K 45



Fescon Corro concrete K 45 is a high-strength, strength-classified special concrete that is resistant to both salt and frost exposure. It is suitable for applications requiring dense concrete surfaces that withstand abrasion and aggressive substances. Typical areas of use include casting, repairing, and strengthening concrete structures, such as: foundations, footings, balcony slabs, quay structures, parking garages, agricultural buildings, and demanding industrial floor castings. Complies with concrete standard SFS EN 206-1, strength class C 35/45. Maximum aggregate size: 4 mm or 10 mm.

GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841530264	CORRO CONCRETE K45 4 MM 25 KG	53026	25 kg	48 sk	x	-
6416841330260	CORRO CONCRETE K45 4 MM 1000 KG	33026	1000 kg		x	-
6416841330086	CORRO CONCRETE K45 10 MM 1000 KG	33008	1000 kg		x	-

x = stock product

Corro concrete SR C35/45

Fescon Corro Concrete SR C35/45 is a high-strength, salt and frost resistant specialty concrete with sulphate resistant cement as binding agent. Suitable for applications requiring wear-resistant and corrosion-resistant tightly sealed concrete surfaces.

Applications include e.g. casting, repairing and reinforcing concrete structures, such as balcony slabs, maritime port facilities, parking garages or industrial construction. The strength class C 35/45 according to concrete standard SFS EN 206-1. The maximum grain size of the product is 4.0 mm. Minimum delivery batch is 3 big bags.



GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841332042	CORRO CONCRETE SR C35/45 1000 KG	33204	1000 kg		-	-

x = stock product

Cement concrete S 100

Standard concrete for common casting applications, such as footings, stairs, foundations, and floor slabs. Frost-resistant after hardening. Compressive strength class C 20/25.

Yield: 12–13 litres / 25 kg. Recommended minimum layer thickness: 30 mm. Maximum aggregate size: 10 mm.



GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841530219	CEMENT CONCRETE S 100 25 KG	53021	25 kg	48 sk	x	x
6416841330963	CEMENT CONCRETE S 100 500 KG	33096	500 kg		x	x
6416841330215	CEMENT CONCRETE S 100 1000 KG	33021	1000 kg		x	x

x = stock product



Grouting concrete JB 600/3

High-strength concrete that expands before setting, intended for grouting and supplementary casting in narrow and difficult spaces. The main applications are installation and jointing casting of pre-cast concrete elements and various anchor grouts. Maximum grain size 3 mm. Strength class C 50/60. SILKO-approved. Ready-to-apply compound 11-12-25 l/25 kg. Meets the requirements of the R4 class.

GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841530226	GROUTING CONCRETE JB 600/3 25 KG	53022	25 kg	48 sk	x	x
6416841330222	GROUTING CONCRETE JB 600/3 1000 KG	33022	1000 kg		x	x

x = stock product



Grouting concrete JB 1000/3

A very high-quality concrete for demanding precision casting, such as the fastening and installation castings of machinery. Due to slight expansion that takes place before setting, the concrete fills the casting space well. Largest grain size 3 mm. Strength class C 60/75. Ready-to-apply compound 11-12 l/25 kg. SILKO-approved. Meets the requirements of the R4 class.

GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841530233	GROUTING CONCRETE JB 1000/3 25 KG	53023	25 kg	48 sk	x	-
6416841330239	GROUTING CONCRETE JB 1000/3 1000 KG	33023	1000 kg		x	-

x = stock product

Grouting concrete JBSR 1000/3

High-strength, salt and frost resistant special concrete with sulphate resistant cement as binding agent. Due to its slight swelling before binding, it fills the casting space effectively. Applications include demanding precision castings, narrow-space and difficult post-work and filling castings, installation and sealing castings of concrete elements and anchoring solders. The strength class C 60/75 according to concrete standard SFS EN 206-1. The maximum grain size of the product is 4.0 mm. Minimum delivery batch is 3 big bags.



GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841332080	GROUTING CONCRETE JBSR 1000/3 1000 KG	33208	1000 kg		-	-

x = stock product

Grouting concrete TJB Winter ❄️

Special concrete that expands before setting for grouting and small-scale concrete work and anchor grouting. Maximum grain size 3 mm. Strength class C40/50. Ready-to-apply compound 11-12 l/25 kg. Working temperature -15°C...+5°C.



GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841530141	GROUTING CONCRETE TJB WINTER 25 KG	53014	25 kg	48 sk	x	x
6416841330147	GROUTING CONCRETE TJB WINTER 1000 KG	33014	1000 kg		x	x

x = stock product

Vertical-joint concrete PSB K30

Non-draining, pumpable special concrete for vertical and horizontal jointing of concrete elements. Largest grain size 4 mm. Ready-to-apply compound approx 500 l/1000 kg. Strength class C 25/30.



GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841330352	VERTICAL-JOINT CONCRETE PSB K30 1000 KG	33035	1000 kg		x	x

x = stock product



Vertical-joint concrete winter TPSB K30 ❄️

Non-draining, pumpable special concrete for vertical and horizontal jointing of concrete elements in winter conditions. Largest grain size 4 mm. Ready-to-apply compound ca. 500 l/1000 kg. Working temperature -15°C...+5°C. Strength class C 25/30.

GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841330369	VERTICAL-JOINT CONCRETE WINTER TPSB K30 1000 KG	33036	1000 kg		x	x

x = stock product



Vertical-joint concrete PSB K40

Non-draining, pumpable special concrete for vertical and horizontal jointing of concrete elements. Largest grain size 4 mm. Ready-to-apply compound ca. 500 l/1000 kg. Strength class C 30/37.

GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841330031	VERTICAL-JOINT CONCRETE PSB K 40 1000 KG	33003	1000 kg		x	-

x = stock product



Vertical-joint concrete winter TPSB K40 ❄️

Non-draining, pumpable special concrete for vertical and horizontal jointing of concrete elements in winter conditions. Largest grain size 4 mm. Ready-to-apply compound ca. 500 l/1000 kg. Working temperature -15°...+5°C. Strength class C 30/37.

GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841330949	VERTICAL-JOINT CONCRETE WINTER TPSB K40	33094	1000 kg		x	-

x = stock product

Vertical-joint concrete PSB K50

Non-draining, pumpable special concrete for vertical and horizontal jointing of concrete elements. Largest grain size 4 mm. Ready-to-apply compound ca. 500 l/1000 kg. Strength class C 40/50.



GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841333476	VERTICAL-JOINT CONCRETE PSB K 50 1000 KG	33347	1000 kg		x	-

x = stock product

Vertical-joint concrete winter TPSB K45 ❄️

Non-draining, pumpable special concrete for vertical and horizontal jointing of concrete elements in winter conditions. Largest grain size 4 mm. Ready-to-apply compound ca. 500 l/1000 kg. Working temperature -15°C...+5°C. Strength class C 35/45.



GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841333568	VERTICAL-JOINT CONCRETE WINTER TPSB K45 1000 KG	33356	1000 kg		x	-

x = stock product

Rapid concrete PB

A special concrete with a rapid strength gain that is suited to, for example, repairs of concrete structures, supplementary casting and floor casting. Strength class C 30/37. Largest grain size 3 mm. Ready-to-apply compound 12-13 l/25 kg. The minimum delivery batch of a 1000 kg package is 3 large sacks.



GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841530240	RAPID CONCRETE PB 25 KG	53024	25 kg	48 sk	x	x
6416841331281	RAPID CONCRETE PB 1000 KG	33128	1000 kg		-	-

x = stock product



Fast Mortar XtremeRapid XR **NEW!**

Fast Mortar XtremeRapid XR is an exceptionally fast-setting cement-based compound. The product hardens in approx. 10 minutes, with a working time of about 4–5 minutes. It is suitable for installing fence posts without separate supports and can be used for concrete repairs and quick castings. Thanks to its rapid strength development, the product can also be used in winter. By adjusting the amount of water, the mix can be made either paste-like or flowable. Suitable for both indoor and outdoor use.

GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841531070	FAST MORTAR XTREMERAPID XR 25 KG	53107	25 kg	48 sk	x	-

x = stock product



Stone joint grout KSL black grey **NEW!**

Cement-based, through-coloured joint mortar for grouting slate and other stone-based tiles and stones in outdoor applications. Suitable for both vertical and horizontal surfaces. Maximum grain size 1.2 mm. For joint widths between 5–30 mm. Frost-resistant after curing.

GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841531407	STONE JOINT GROUT KSL BLACK GREY 25 KG	53140	25 kg	48 sk	x	-

x = stock product

2 FIREPLACE MORTARS

Clay stove mortar SUL

For the burnt brick masonry of the frame and flues of wood-heated fireplaces indoors. Fireproof mortar must be used in fireplace masonry. Regular masonry mortar is used for the separate shell.



GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841530653	CLAY STOVE MORTAR SUL 25 KG	53065	25 kg	48 sk	x	x

x = stock product

Fireproof masonry mortar TKM

For thin-walled masonry of firebricks used in indoor wood-fired household fireplaces. Heat resistance over +1200°C. A 20 kg bag yields 9,6 - 10,4 litres of finished mortar, which is enough for laying around 80 firebricks.



GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841630667	FIREPROOF MASONRY MORTAR TKM 5 KG	63066	5 kg	90 prk	x	x
6416841531162	FIREPROOF MASONRY MORTAR TKM 20 KG	53116	20 kg	48 sk	x	x

x = stock product

Fireproof casting concrete TKV

For the parts of ovens, fireplaces, grills and sauna stoves that need to be fireproof. Maximum operating temperature +1200°C. Minimum casting thickness 50 mm. Ready-to-apply compound 11-12 l/25 kg. Remains usable for one hour. Do not use reinforcement.



GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841530677	FIREPROOF CASTING CONCRETE TKV 25 KG	53067	25 kg	48 sk	x	x

x = stock product



Fireproof repairing compound TTK

For patching chips, cracks and cavities in the fire boxes of household fireplaces. Heat resistance + 1300°C.

					HYVINKÄÄ	OULU
GTIN code	Product name	Product number	Package size	Platform size	In Stock	In Stock
6416841631510	FIREPROOF REPAIRING COMPOUND TTK 2 KG	63151	2 kg	120 prk	x	x

x = stock product

3-4 MASONRY MORTARS

Masonry mortar M100/600



Cement-based mortar for burnt and sand-lime brick masonry outdoors and indoors. For brick work jointing, jointing of natural and slate stones on vertical surfaces and for repairing existing mortar joints. For cold flue parts in chimney masonry, such as in cold attics and above the roof, as well as for the masonry of the outer brick shell of the fireplace. Maximum grain size 2.0 mm. Material usage 1.2 kg / MRT, 1.5 kg / NKH, 1.7 kg / NRT. Amount of finished mortar: 13 - 14 l / 25 kg.



GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841530387	MASONRY MORTAR M100/600 25 KG	53038	25 kg	48 sk	x	x
6416841330376	MASONRY MORTAR M100/600 500 KG	33037	500 kg		x	x
6416841330383	MASONRY MORTAR M100/600 1000 KG	33038	1000 kg		x	x
6416841530394	MASONRY MORTAR 39 QUARTZ WHITE 25 KG	53039	25 kg	48 sk	x	-
6416841330390	MASONRY MORTAR 39 QUARTZ WHITE 1000 KG	33039	1000 kg		-	-
6416841530592	MASONRY MORTAR 59 BIRCH BARK WHITE 25 KG	53059	25 kg	48 sk	x	-
6416841330598	MASONRY MORTAR 59 BIRCH BARK WHITE 1000 KG	33059	1000 kg		-	-
6416841530400	MASONRY MORTAR 40 LIME GREY 25 KG	53040	25 kg	48 sk	x	-
6416841330406	MASONRY MORTAR 40 LIME GREY 1000 KG	33040	1000 kg		-	-
6416841330413	MASONRY MORTAR 41 GRAIN YELLOW 1000 KG	33041	1000 kg		-	-
6416841330420	MASONRY MORTAR 42 BRICK RED 1000 KG	33042	1000 kg		-	-
6416841330451	MASONRY MORTAR 45 EARTH BROWN 1000 KG	33045	1000 kg		-	-
6416841530462	MASONRY MORTAR 46 PEAT BROWN 25 KG	53046	25 kg	48 sk	x	-
6416841330468	MASONRY MORTAR 46 PEAT BROWN 1000 KG	33046	1000 kg		-	-
6416841530486	MASONRY MORTAR 48 BLACK GREY 25 KG	53048	25 kg	48 sk	x	-
6416841330482	MASONRY MORTAR 48 BLACK GREY 1000 KG	33048	1000 kg		-	-
6416841530523	MASONRY MORTAR 52 LINEN LIGHT 25 KG	53052	25 kg	48 sk	-	-
6416841330529	MASONRY MORTAR 52 LINEN LIGHT 1000 KG	33052	1000 kg		-	-
6416841330444	MASONRY MORTAR 44 SAND BROWN 1000 KG	33044	1000 kg		-	-
6416841339225	MASONRY MORTAR 71 SWAN 1000 KG	33922	1000 kg		-	-
6416841339263	MASONRY MORTAR 72 BELOW 1000 KG	33926	1000 kg		-	-
6416841339270	MASONRY MORTAR 73 CUCKOO 1000 KG	33927	1000 kg		-	-
6416841339218	MASONRY MORTAR 74 HAWK 1000 KG	33933	1000 kg		-	-
6416841339249	MASONRY MORTAR 75 LARK 1000 KG	33924	1000 kg		-	-

6416841339201	MASONRY MORTAR 77 JACKDAW 1000 KG	33920	1000 kg		-	-
6416841339256	MASONRY MORTAR 79 PTARMIGAN 1000 KG	33925	1000 kg		-	-
6416841339287	MASONRY MORTAR 80 SIBERIAN JAY 1000 KG	33928	1000 kg		-	-
6416841339324	MASONRY MORTAR 81 TEAL 1000 KG	33932	1000 kg		-	-
6416841339218	MASONRY MORTAR 82 CAPERCAILLIE 1000 KG	33921	1000 kg		-	-
6416841339362	MASONRY MORTAR 83 WILLOW GROUSE 1000 KG	33936	1000 kg		-	-
6416841339348	MASONRY MORTAR 85 RAVEN 1000 KG	33934	1000 kg		-	-
6416841339355	MASONRY MORTAR 86 HAZEL HEN 1000 KG	33935	1000 kg		-	-

x = stock product



Masonry mortar M100/600 Winter ❄️

Cement-based mortar for burnt and sand-lime brick facade masonry in winter conditions in the temperature range -15°C...+5°C. Suitable for brickwork repointing and for repairing mortar joints. The maximum grain size is 2.0 mm. Material usage 1.2 kg / MRT, 1.5 kg / NKH, 1.7 kg / NRT.

GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841330703	MASONRY MORTAR M100/600 WINTER 1000 KG	33070	1000 kg		x	-
6416841340009	MASONRY MORTAR 39 QUARTZ WHITE WINTER 1000 KG	34000	1000 kg		-	-
6416841340016	MASONRY MORTAR 59 BIRCH BARK WHITE WINTER 1000 KG	34001	1000 kg		-	-
6416841340023	MASONRY MORTAR 40 LIME GREY WINTER 1000 KG	34002	1000 kg		-	-
6416841340030	MASONRY MORTAR 41 GRAIN YELLOW WINTER 1000 KG	34003	1000 kg		-	-
6416841340047	MASONRY MORTAR 42 BRICK RED WINTER 1000 KG	34004	1000 kg		-	-
6416841340054	MASONRY MORTAR 45 EARTH BROWN WINTER 1000 KG	34005	1000 kg		-	-
6416841340061	MASONRY MORTAR 46 PEAT BROWN WINTER 1000 KG	34006	1000 kg		-	-
6416841340078	MASONRY MORTAR 48 BLACK GREY WINTER 1000 KG	34007	1000 kg		-	-
6416841340085	MASONRY MORTAR 52 LINEN LIGHT WINTER 1000 KG	34008	1000 kg		-	-
6416841340306	MASONRY MORTAR 44 SAND BROWN WINTER 1000 KG	34030	1000 kg		-	-
6416841340221	MASONRY MORTAR 71 SWAN WINTER 1000 KG	34022	1000 kg		-	-
6416841340252	MASONRY MORTAR 72 ALI WINTER 1000 KG	34025	1000 kg		-	-
6416841340276	MASONRY MORTAR 73 CUCKOO WINTER 1000 KG	34027	1000 kg		-	-
6416841340153	MASONRY MORTAR 74 HAWK WINTER 1000 KG	34015	1000 kg		-	-
6416841340269	MASONRY MORTAR 75 LARK WINTER 1000 KG	34026	1000 kg		-	-

6416841340207	MASONRY MORTAR 77 JACKDAW WINTER 1000 KG	34020	1000 kg		-	-
6416841340245	MASONRY MORTAR 79 PTARMIGAN WINTER 1000 KG	34024	1000 kg		-	-
6416841340290	MASONRY MORTAR 80 SIBERIAN JAY WINTER 1000 KG	34029	1000 kg		-	-
6416841340115	MASONRY MORTAR 81 TEAL WINTER 1000 KG	34011	1000 kg		-	-
6416841340214	MASONRY MORTAR 82 CAPERCAILLIE WINTER 1000 KG	34021	1000 kg		-	-
6416841340320	MASONRY MORTAR 83 WILLOW GROUSE WINTER 1000 KG	34032	1000 kg		-	-
6416841340122	MASONRY MORTAR 85 RAVEN WINTER 1000 KG	34012	1000 kg		-	-
6416841340139	MASONRY MORTAR 86 HAZEL HEN WINTER 1000 KG	34013	1000 kg		-	-

x = stock product

Compact mortar M100/600

Cement-based mortar for burnt and sand-lime brick masonry for facades exposed to harsh weather conditions. Suitable for locations subject to heavy slanted rain. Suitable for repointing brickwork and natural and slate stones on vertical surfaces, and for repairing mortar joints. Contains additives to improve density, weather resistance and workability. Maximum grain size 2.0 mm. Usage: 1.2 kg / MRT, 1.5 kg / NKH, 1.7 kg / NRT.



GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841331007	COMPACT MORTAR M 100/600 1000 KG	33100	1000 kg		x	-
6416841331335	COMPACT MORTAR 39 QUARTZ WHITE 1000 KG	33133	1000 kg		-	-
6416841331014	COMPACT MORTAR 59 BIRCH BARK WHITE 1000 KG	33101	1000 kg		-	-
6416841331045	COMPACT MORTAR 40 LIME GREY 1000 KG	33104	1000 kg		-	-
6416841331038	COMPACT MORTAR 41 GRAIN YELLOW 1000 KG	33103	1000 kg		-	-
6416841344250	COMPACT MORTAR 42 BRICK RED 1000 KG	34425	1000 kg		-	-
6416841331052	COMPACT MORTAR 45 EARTH BROWN 1000 KG	33105	1000 kg		-	-
6416841331069	COMPACT MORTAR 46 PEAT BROWN 1000 KG	33106	1000 kg		-	-
6416841331076	COMPACT MORTAR 48 BLACK GREY 1000 KG	33107	1000 kg		-	-
6416841344274	COMPACT MORTAR 52 LINEN LIGHT 1000 KG	34427	1000 kg		-	-
6416841344182	COMPACT MORTAR 44 SAND BROWN 1000 KG	34418	1000 kg		-	-
6416841344137	COMPACT MORTAR 71 SWAN 1000 KG	34413	1000 kg		-	-
6416841344168	COMPACT MORTAR 72 BELOW 1000 KG	34416	1000 kg		-	-
6416841344083	COMPACT MORTAR 73 CUCKOO 1000 KG	34408	1000 kg		-	-
6416841344144	COMPACT MORTAR 74 HAWK 1000 KG	34414	1000 kg		-	-
6416841344113	COMPACT MORTAR 75 LARK 1000 KG	34411	1000 kg		-	-

6416841344120	COMPACT MORTAR 77 JACKDAW 1000 KG	34412	1000 kg		-	-
6416841344106	COMPACT MORTAR 79 PTARMIGAN 1000 KG	34410	1000 kg		-	-
6416841344243	COMPACT MORTAR 80 SIBERIAN JAY 1000 KG	34424	1000 kg		-	-
6416841344298	COMPACT MORTAR 81 TEAL 1000 KG	34429	1000 kg		-	-
6416841344151	COMPACT MORTAR 82 CAPERCAILLIE 1000 KG	34415	1000 kg		-	-
6416841344229	COMPACT MORTAR 83 WILLOW GROUSE 1000 KG	34422	1000 kg		-	-
6416841344199	COMPACT MORTAR 85 RAVEN 1000 KG	34419	1000 kg		-	-
6416841344236	COMPACT MORTAR 86 HAZEL HEN 1000 KG	34423	1000 kg		-	-

x = stock product



Compact mortar M100/600 Winter ❄️

Cement-based mortar for burnt and sand-lime brick masonry for facades exposed to harsh winter weather in the temperature range -15°C...+5°C. Suitable for locations subject to heavy slanted rain. Suitable for repointing brickwork and natural and slate stones on vertical surfaces, and for repairing mortar joints. Contains additives to improve density, weather resistance and workability. Maximum grain size 2.0 mm. Usage: 1.2 kg / MRT, 1.5 kg / NKH, 1.7 kg / NRT.

GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841331106	COMPACT MORTAR M100/600 WINTER 1000 KG	33110	1000 kg		x	-
6416841335418	COMPACT MORTAR 39 QUARTZ WHITE WINTER 1000 KG	33541	1000 kg		-	-
6416841331199	COMPACT MORTAR 59 BIRCH BARK WHITE WINTER 1000 KG	33119	1000 kg		-	-
6416841345424	COMPACT MORTAR 40 LIME GREY WINTER 1000 KG	34542	1000 kg		-	-
6416841345417	COMPACT MORTAR 41 GRAIN YELLOW WINTER 1000 KG	34541	1000 kg		-	-
6416841345158	COMPACT MORTAR 42 BRICK RED WINTER 1000 KG	34515	1000 kg		-	-
6416841345455	COMPACT MORTAR 45 EARTH BROWN WINTER 1000 KG	34545	1000 kg		-	-
6416841345622	COMPACT MORTAR 46 PEAT BROWN WINTER 1000 KG	34562	1000 kg		-	-
6416841345479	COMPACT MORTAR 48 BLACK GREY WINTER 1000 KG	34547	1000 kg		-	-
6416841345172	COMPACT MORTAR 52 LINEN LIGHT WINTER 1000 KG	34517	1000 kg		-	-
6416841345486	COMPACT MORTAR 44 SAND BROWN WINTER 1000 KG	34548	1000 kg		-	-
6416841335579	COMPACT MORTAR 71 SWAN WINTER 1000 KG	34557	1000 kg		-	-
6416841345615	COMPACT MORTAR 72 BELOW WINTER 1000 KG	34561	1000 kg		-	-
6416841345684	COMPACT MORTAR 73 CUCKOO WINTER 1000 KG	34568	1000 kg		-	-
6416841345547	COMPACT MORTAR 74 HAWK WINTER 1000 KG	34554	1000 kg		-	-
6416841345561	COMPACT MORTAR 75 LARK WINTER 1000 KG	34556	1000 kg		-	-

6416841345509	COMPACT MORTAR 77 JACKDAW WINTER 1000 KG	34550	1000 kg		-	-
6416841345608	COMPACT MORTAR 79 PTARMIGAN WINTER 1000 KG	34560	1000 kg		-	-
6416841345660	COMPACT MORTAR 80 SIBERIAN JAY WINTER 1000 KG	34566	1000 kg		-	-
6416841345585	COMPACT MORTAR 81 TEAL WINTER 1000 KG	34558	1000 kg		-	-
6416841345516	COMPACT MORTAR 82 CAPERCAILLIE WINTER 1000 KG	34551	1000 kg		-	-
6416841345677	COMPACT MORTAR 83 WILLOW GROUSE WINTER 1000 KG	34567	1000 kg		-	-
6416841345639	COMPACT MORTAR 85 RAVEN WINTER 1000 KG	34563	1000 kg		-	-
6416841345653	COMPACT MORTAR 86 HAZEL HEN WINTER 1000 KG	34565	1000 kg		-	-

x = stock product

Compact mortar Heavy M100/600

Cement-based mortar for burnt and sand-lime brick masonry for facades exposed to extremely harsh weather. Especially suitable for coastal sites where structures will have to withstand wind and weathering. Suitable for brickwork repointing and for repairing mortar joints. Contains additives to improve density, weather resistance and workability. Maximum grain size 2.0 mm. Usage: 1.2 kg / MRT, 1.5 kg / NKH, 1.7 kg / NRT.



GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841344601	COMPACT MORTAR HEAVY M100/600 1000 KG	34460	1000 kg		-	-
6416841345011	COMPACT MORTAR HEAVY 39 QUARTZ WHITE 1000 KG	34501	1000 kg		-	-
6416841345028	COMPACT MORTAR HEAVY 59 BIRCH BARK WHITE 1000 KG	34502	1000 kg		-	-
6416841345035	COMPACT MORTAR HEAVY 40 LIME GREY 1000 KG	34503	1000 kg		-	-
6416841345042	COMPACT MORTAR HEAVY 41 GRAIN YELLOW 1000 KG	34504	1000 kg		-	-
6416841345059	COMPACT MORTAR HEAVY 42 BRICK RED 1000 KG	34505	1000 kg		-	-
6416841345066	COMPACT MORTAR HEAVY 45 EARTH BROWN 1000 KG	34506	1000 kg		-	-
6416841345073	COMPACT MORTAR HEAVY 46 PEAT BROWN 1000 KG	34507	1000 kg		-	-
6416841345080	COMPACT MORTAR HEAVY 48 BLACK GREY 1000 KG	34508	1000 kg		-	-
6416841345097	COMPACT MORTAR HEAVY 52 LINEN LIGHT 1000 KG	34509	1000 kg		-	-
6416841345189	COMPACT MORTAR HEAVY 44 SAND BROWN 1000 KG	34518	1000 kg		-	-
6416841345202	COMPACT MORTAR HEAVY 71 SWAN 1000 KG	34520	1000 kg		-	-
6416841345165	COMPACT MORTAR HEAVY 72 BELOW 1000 KG	34516	1000 kg		-	-
6416841345141	COMPACT MORTAR HEAVY 73 CUCKOO 1000 KG	34514	1000 kg		-	-
6416841344649	COMPACT MORTAR HEAVY 74 HAWK 1000 KG	34464	1000 kg		-	-
6416841345110	COMPACT MORTAR HEAVY 75 LARK 1000 KG	34511	1000 kg		-	-

6416841345127	COMPACT MORTAR HEAVY 77 JACKDAW 1000 KG	34512	1000 kg		-	-
6416841345103	COMPACT MORTAR HEAVY 79 PTARMIGAN 1000 KG	34510	1000 kg		-	-
6416841345240	COMPACT MORTAR HEAVY 80 SIBERIAN JAY 1000 KG	34524	1000 kg		-	-
6416841345219	COMPACT MORTAR HEAVY 81 TEAL 1000 KG	34521	1000 kg		-	-
6416841344410	COMPACT MORTAR HEAVY 82 CAPERCAILLIE 1000 KG	34441	1000 kg		-	-
6416841345226	COMPACT MORTAR HEAVY 83 WILLOW GROUSE 1000 KG	34522	1000 kg		-	-
6416841345196	COMPACT MORTAR HEAVY 85 RAVEN 1000 KG	34519	1000 kg		-	-
6416841345233	COMPACT MORTAR HEAVY 86 HAZEL HEN 1000 KG	34523	1000 kg		-	-

x = stock product



Compact mortar Heavy M100/600 Winter ❄️

Cement-based mortar for burnt and sand-lime brick masonry for facades exposed to extremely harsh winter weather in the temperature range -15°C...+5°C. Especially suitable for coastal sites where structures will have to withstand wind and weathering. Suitable for brickwork repointing and for repairing mortar joints. Contains additives to improve density, weather resistance and workability. Maximum grain size 2.0 mm. Usage: 1.2 kg / MRT, 1.5 kg / NKH, 1.7 kg / NRT.

GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841346001	COMPACT MORTAR HEAVY M100/600 WINTER 1000 KG	34600	1000 kg		-	-
6416841345318	COMPACT MORTAR HEAVY 39 QUARTZ WHITE WINTER 1000 KG	34531	1000 kg		-	-
6416841345325	COMPACT MORTAR HEAVY 59 BIRCH BARK WHITE WINTER 1000 KG	34532	1000 kg		-	-
6416841345332	COMPACT MORTAR HEAVY 40 LIME GREY WINTER 1000 KG	34533	1000 kg		-	-
6416841345349	COMPACT MORTAR HEAVY 41 GRAIN YELLOW WINTER 1000 KG	34534	1000 kg		-	-
6416841345356	COMPACT MORTAR HEAVY 42 BRICK RED WINTER 1000 KG	34535	1000 kg		-	-
6416841345363	COMPACT MORTAR HEAVY 45 EARTH BROWN WINTER 1000 KG	34536	1000 kg		-	-
6416841345370	COMPACT MORTAR HEAVY 46 PEAT BROWN WINTER 1000 KG	34537	1000 kg		-	-

6416841345387	COMPACT MORTAR HEAVY 48 BLACK GREY WINTER 1000 KG	34538	1000 kg		-	-
6416841345295	COMPACT MORTAR HEAVY 52 LINEN LIGHT WINTER 1000 KG	34539	1000 kg		-	-
6416841345783	COMPACT MORTAR HEAVY 44 SAND BROWN WINTER 1000 KG	34578	1000 kg		-	-
6416841345905	COMPACT MORTAR HEAVY 71 SWAN WINTER 1000 KG	34590	1000 kg		-	-
6416841345462	COMPACT MORTAR HEAVY 72 BELOW WINTER 1000 KG	34546	1000 kg		-	-
6416841345691	COMPACT MORTAR HEAVY 73 CUCKOO WINTER 1000 KG	34569	1000 kg		-	-
6416841345844	COMPACT MORTAR HEAVY 74 HAWK WINTER 1000 KG	34584	1000 kg		-	-
6416841345004	COMPACT MORTAR HEAVY 75 LARK WINTER 1000 KG	34500	1000 kg		-	-
6416841345134	COMPACT MORTAR HEAVY 77 JACKDAW WINTER 1000 KG	34513	1000 kg		-	-
6416841345806	COMPACT MORTAR HEAVY 79 PTARMIGAN WINTER 1000 KG	34580	1000 kg		-	-
6416841345943	COMPACT MORTAR HEAVY 80 SIBERIAN JAY WINTER 1000 KG	34594	1000 kg		-	-
6416841345912	COMPACT MORTAR HEAVY 81 TEAL WINTER 1000 KG	34591	1000 kg		-	-
6416841345714	COMPACT MORTAR HEAVY 82 CAPERCAILLIE WINTER 1000 KG	34571	1000 kg		-	-
6416841345929	COMPACT MORTAR HEAVY 83 WILLOW GROUSE WINTER 1000 KG	34592	1000 kg		-	-
6416841345790	COMPACT MORTAR HEAVY 85 RAVEN WINTER 1000 KG	34579	1000 kg		-	-
6416841345950	COMPACT MORTAR HEAVY 86 HAZEL HEN WINTER 1000 KG	34595	1000 kg		-	-

x = stock product

Winter-time masonry mortar TML ❄️

For block and brick masonry in winter conditions in the temperature range -15°C...+5°C. Material usage: For bricks, the same as with masonry mortar, and for bricks, the same as with block mortar. Remains usable for around 0.5 h. Amount of finished mortar: 13-14 l/25 kg



GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841530509	WINTER-TIME MASONRY MORTAR TML 25 KG	53050	25 kg	48 sk	x	-

x = stock product



Block mortar M100/500

For masonry of lightweight concrete blocks using a 10 mm seam. Usage: around 4 kg / H75-UH150, around 7 kg / UH200-RUH380. Remains usable for around 3 h.

GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841530493	BLOCK MORTAR M100/500 25 KG	53049	25 kg	48 sk	x	x
6416841330499	BLOCK MORTAR M100/500 1000 KG	33049	1000 kg		x	x

x = stock product



Block mortar M100/500 Winter ❄️

For masonry of lightweight concrete blocks using a 10 mm seam in winter conditions in the temperature range -15°C...+5°C. Material usage: ca. 4 kg / H75-UH150, ca. 7 kg / UH200-RUH380.

GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841330505	BLOCK MORTAR M100/500 WINTER 1000 KG	33050	1000 kg		-	-

x = stock product



Thin seam mortar KVL Stone adhesive



For thin joint masonry of calcium silicate bricks and blocks, as well as other partition wall blocks and lightweight concrete blocks, with a 2 mm joint thickness. Strength class M15. Also suitable for textured (roughcast) rendering. For interior and exterior use. Consumption: 2–4 kg/m² for thin joint masonry, 3–6 kg/m² for textured rendering.

GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841530325	THIN SEAM MORTAR KVL STONE ADHESIVE 25 KG	53032	25 kg	48 sk	x	x

x = stock product

Mortar for tongue-and-groove blocks PHL

For masonry of lightweight concrete blocks using a 5 mm seam. Usage: around 1.5 kg/ UH 100-150, around 2.5 kg/ RUH 200-420, around 2.5 - 3.5 kg/ EH 420.



GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841530196	MORTAR FOR TONGUE AND GROOVE BLOCKS PHL 25 KG	53019	25 kg	48 sk	x	x
6416841330161	MORTAR FOR TONGUE-AND-GROOVE BLOCKS PHL 500 KG	33016	500 kg		x	x
6416841330192	MORTAR FOR TONGUE-AND-GROOVE BLOCKS PHL 1000 KG	33019	1000 kg		x	x

x = stock product

Mortar for tongue and groove blocks PHL Winter ❄️

Fescon Mortar for tongue and groove blocks PHL Winter is a dry mortar for winter masonry of lightweight concrete blocks using a 5 mm seam. The maximum grain size is 1.2 mm. Working temperature -15°C...+5°C.



GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841530097	MORTAR FOR TONGUE AND GROOVE BLOCKS PHL WINTER 25 KG	53009	25 kg	48 sk	-	-
6416841330246	MORTAR FOR TONGUE AND GROOVE BLOCKS PHL WINTER 1000 KG	33024	1000 kg		-	-

x = stock product



ELT Brick element grout

A coloured concrete-type grout for the grouting of industrial prefabricated brick elements. Maximum grain size 1.2 mm. Minimum delivery 3 big bags.

GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841330901	ELT BRICK ELEMENT GROUT GREY 1000 KG	33090	1000 kg		-	-
6416841330987	ELT BRICK ELEMENT GROUT QUARTZ WHITE 900 KG	33098	900 kg		-	-
6416841332103	ELT BRICK ELEMENT BIRCH BARK WHITE 900 KG	33210	900 kg		-	-
6416841332110	ELT BRICK ELEMENT GROUT LIME GREY 900 KG	33211	900 kg		-	-
6416841332127	ELT BRICK ELEMENT GROUT GRAIN YELLOW 900 KG	33212	900 kg		-	-
6416841332134	ELT BRICK ELEMENT GROUT BRICK RED 900 KG	33213	900 kg		-	-
6416841332141	ELT BRICK ELEMENT GROUT EARTHY BROWN 900 KG	33214	900 kg		-	-
6416841332158	ELT BRICK ELEMENT GROUT PEAT BROWN 900 KG	33215	900 kg		-	-
6416841332165	ELT BRICK ELEMENT GROUT BLACK-GREY 900KG	33216	900 kg		-	-
6416841332172	ELT BRICK ELEMENT GROUT LINEN LIGHT 900 KG	33217	900 kg		-	-
6416841332349	ELT BRICK ELEMENT GROUT SAND BROWN 900 KG	33234	900 kg		-	-
6416841332356	ELT BRICK ELEMENT GROUT SWAN 900 KG	33235	900 kg		-	-
6416841332318	ELT BRICK ELEMENT GROUT BELOW 900 KG	33231	900 kg		-	-
6416841332387	ELT BRICK ELEMENT GROUT PERSIMMON 900 KG	33238	900 kg		-	-
6416841332332	ELT BRICK ELEMENT GROUT HAWK 900 KG	33233	900 kg		-	-
6416841332363	ELT BRICK ELEMENT GROUT LARK 900 KG	33236	900 kg		-	-
6416841332400	ELT BRICK ELEMENT GROUT JACKDAW 900 KG	33240	900 kg		-	-
6416841332455	ELT BRICK ELEMENT GROUT PTARMIGAN 900 KG	33245	900 kg		-	-
6416841332462	ELT BRICK ELEMENT GROUT HEARD 900 KG	33246	900 kg		-	-
6416841332301	ELT BRICK ELEMENT GROUT TEAL 900 KG	33230	900 kg		-	-
6416841332394	ELT BRICK ELEMENT GROUT CAPERCAILLIE 900 KG	33239	900 kg		-	-
6416841332417	ELT BRICK ELEMENT GROUT WILLOW GROUSE 900 KG	33241	900 kg		-	-
6416841332370	ELT BRICK ELEMENT GROUT RAVEN 900 KG	33237	900 kg		-	-
6416841332554	ELT BRICK ELEMENT GROUT HAZEL HEN 900 KG	33255	900 kg		-	-

x = stock product

ELK Clinker element grout

Concrete-type grout for the grouting of industrial prefabricated clinker elements.
Maximum grain size 0.6 mm. Minimum delivery 3 big bags.



					HYVINKÄÄ	OULU
GTIN code	Product name	Product number	Package size	Platform size	In Stock	In Stock
6416841330918	ELK JOINT GROUT GREY 1000 KG	33091	1000 kg		-	-

x = stock product

5 WALL LEVELING COMPOUNDS



Joint filler SF



A polymer-based putty and jointing product for interior walls. Suitable for block, concrete, lightweight concrete, Bedding plaster LF, brick plaster and gypsum board surfaces, and in the levelling of painted surfaces and the jointing of gypsum boards. Usage: 1.2 kg/m²/1 mm layer. Whitish colour.

GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841201003	JOINT FILLER SF 20 KG	20100	20 kg	48 sk	x	-

x = stock product



Bedding plaster LF



A polymer-based bedding plaster for wall and ceiling surfaces in dry spaces. Suitable for block, concrete, lightweight concrete, brick, brick plaster, Bedding plaster VF and Finishing plaster VHF surfaces. Usage: 1.2 kg/m²/1 mm layer. Layer thickness 1 - 5 mm. Whitish colour.

GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841201010	BEDDING PLASTER LF 20 KG	20101	20 kg	48 sk	x	x

x = stock product



Bedding plaster LF RD



A polymer-based low-dust bedding plaster for wall and ceiling surfaces in dry spaces. Suitable for block, concrete, lightweight concrete, brick, brick plaster, Bedding plaster VF and Finishing plaster VHF surfaces. Usage: 1.2 kg/m²/1 mm layer. Layer thickness 1 - 5 mm. Whitish colour. Minimum delivery 3 pallets.

GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841201010	BEDDING PLASTER LF 20 KG	20101	20 kg	48 sk	x	x

x = stock product



Low dust.

Finishing plaster LRF



A polymer-based finishing plaster for wall and ceiling surfaces in dry spaces. Suitable for block, concrete, lightweight concrete, Bedding plaster LF, brick plaster and gypsum board surfaces. Usage: 1.2 kg/m²/1 mm layer. Layer thickness 0 - 3 mm. Whitish colour.



GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841201027	FINISHING PLASTER LRF 20 KG	20102	20 kg	48 sk	x	x

x = stock product

Finishing plaster LRF RD



A polymer-based, low-dust finishing plaster for wall and ceiling surfaces in dry spaces. Suitable for block, concrete, lightweight concrete, Bedding plaster LF and LF RD, brick plaster and gypsum board surfaces. Usage: 1.2 kg/m²/1 mm layer. Layer thickness 0 - 3 mm. Whitish colour. Minimum delivery 3 pallets.



GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841202406	FINISHING PLASTER LRF RD 20 KG	20240	20 kg	48 sk	-	-

x = stock product

Brick bedding plaster TTF



A cement-based bedding plaster for wall and ceiling surfaces in dry and wet spaces. Suitable for block, brick, lightweight concrete, brick plaster and plastered surfaces. Usage: 1.2 kg/m²/1 mm layer. Layer thickness 2 - 10 mm. Colour grey.



GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841201034	BRICK BEDDING PLASTER TTF 20 KG	20103	20 kg	48 sk	x	x

x = stock product



Bedding plaster VF



A cement-based bedding plaster for wall and ceiling surfaces in dry and wet spaces. Suitable for block, lightweight concrete, brick and concrete surfaces. Usage: 1.2 kg/m²/1 mm layer. Layer thickness 1 - 5 mm. Grey colour.

GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841201041	BEDDING PLASTER VF 20 KG	20104	20 kg	48 sk	x	-

x = stock product



Finishing plaster VHF



A cement-based finishing plaster for wall and ceiling surfaces in dry and wet spaces. Suitable for block, lightweight concrete and Bedding plaster VF surfaces. Usage: 1.2 kg/m²/1 mm layer. Layer thickness 0 - 3 mm. Grey colour.

GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841201058	FINISHING PLASTER VHF 20 KG	20105	20 kg	48 sk	x	-

x = stock product



Levelling compound for wet areas WTT



A cement-based wall finishing plaster for wet areas, particularly under moisture insulation. Also suitable for pump application. Usage: 1.2 kg/m²/1 mm layer. Layer thickness 2-10 mm.

GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841201072	LEVELLING COMPOUND FOR WET AREAS WTT 20 KG	20107	20 kg	48 sk	x	x

x = stock product

Filling plaster TLR



A quickly hardening and drying filling plaster with a special cement binder for interior wall surfaces in dry, humid and wet areas. Recommended layer thickness: 5-30 mm. Usage: 1 mm layer 1.5 kg/m².



GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841201089	FILLING PLASTER TLR 20 KG	20108	20 kg	48 sk	x	-

x = stock product

Indoor lime-cement plaster SR 7



Quickly hardening and drying indoor lime-cement plaster that can be sprayed or applied manually, containing special cement binders, fibre-reinforced. Use: Straightening walls and ceilings, filling and repairs in dry, damp and wet areas.



GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841201102	INDOOR LIME-CEMENT PLASTER SR 7 20 KG	20110	20 kg	48 sk	x	-

x = stock product


Gypsum plaster mix GL

Pumpable, lightweight, non-shrinking gypsum levelling compound, which is also suitable for shaping manually. Fescon Gypsum Plaster Mix GL is meant for straightening and levelling wall and ceiling surfaces in dry indoor spaces for layer thicknesses as large as 40 mm.



GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841202383	GYPSUM PLASTER MIX GL 15 KG	20238	15 kg	48 sk	x	-

x = stock product



Wall surface strengthening membrane

Surface reinforcement fabric for reinforcing screed surfaces of walls. Roll size 1.0 m x 50 m.

					HYVINKÄÄ	OULU
GTIN code	Product name	Product number	Package size	Platform size	In Stock	In Stock
6416841257116	WALL SURFACE STRENGTHENING MEMBRANE 1 M x 50 M	25711	1 roll		-	-

x = stock product

6 FLOOR LEVELING PRODUCTS

Underfloor heating filler LL 5500



Manually applied, fast-drying and fast-setting, fibre-reinforced cement-based floor screed. Application: For covering underfloor heating cables and pipes, as well as for floor castings, filling, levelling, and sloping in indoor areas. Maximum aggregate size: 1.2 mm. Layer thickness: 10–80 mm. Dry consumption: approx. 1.8 kg/m²/mm.



GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841202017	UNDERFLOOR HEATING FILLER LL 5500 20 KG	20201	20 kg	48 sk	x	x

x = stock product

Coarse floor levelling compound LM 5000



Fast-setting and fast-drying, manually applied cement-based floor screed. Application: Slope correction, floor levelling, filling, surface correction, and sloping castings in indoor environments. Maximum aggregate size: 1.2 mm. Layer thickness: 5–80 mm. Dry consumption: approx. 1.8 kg/m²/mm.



GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841202024	COARSE FLOOR LEVELLING COMPOUND LM 5000 20 KG	20202	20 kg	48 sk	x	x

x = stock product

Floor levelling plaster LT 4000



Easy-to-level, fast-setting and fast-drying, manually applied cement-based floor screed. Application: Levelling and correcting floors in indoor areas, including slope correction. Maximum aggregate size: 0.6 mm. Layer thickness: 3–30 mm. Dry consumption: approx. 1.5 kg/m²/mm.



GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841202031	FLOOR LEVELLING PLASTER LT 4000 20 KG	20203	20 kg	48 sk	x	x

x = stock product



Floor concrete LB 7



Special cement-based, pumpable floor concrete with very fast drying properties for indoor use. Application: Ideally suited for sloped floor castings in both new construction and renovation projects. Maximum aggregate size: 3.0 mm. Layer thickness: 30–150 mm. Dry consumption: approx. 1.8 kg/m²/mm.

GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841202154	FLOOR CONCRETE LB 7 20 KG	20215	20 kg	48 sk	x	-
6416841333407	FLOOR CONCRETE LB 7 1000 KG	33340	1000 kg		x	-

x = stock product



Fescorapid



Special cement-based, fast-setting and fast-drying, versatile repair mortar. Application: For floor, wall, and ceiling surfaces. Suitable for both indoor and outdoor use. Maximum aggregate size: 0.6 mm. Layer thickness: 2–20 mm. Consumption: 1.5 kg/m²/mm. Minimum delivery quantity: 4 containers per 5 kg unit.

GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841631015	FESCORAPID 5 KG	63101	5 kg		x	x
6416841202352	FESCORAPID 20 KG	20235	20 kg	48 sk	x	-

x = stock product



Fescofine



Special cement-based, fast-setting and fast-drying versatile finishing compound for floor, wall, and ceiling surfaces. Suitable for both indoor and outdoor use. Maximum grain size: 0.1 mm

GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841202390	FESCOFINE 20 KG	20239	20 kg	48 sk	x	-

x = stock product

FlowPlan



Easy to use and highly spreadable cement-based floor screed for layers of less than 20 mm. Suitable for use as a base for mats in public areas and for all finishing and overlay applications. Can be used for overlaying all Fescon flooring products and as a subfloor structure for polyurethane and epoxy coatings with a layer thickness of more than 3 mm. FlowPlan can be used for overlaying underfloor heating cables and for thin finishing layers in wet rooms before waterproofing. Suitable for painting, tiling or as a base for adhesive surface materials. Maximum grain size 0.3 mm. For layer thickness 1 - 15 mm (partial levelling max. 20 mm). A low-alkali (pH < 11). For indoor use.



GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841202307	FLOWPLAN 20 KG	20230	20 kg	48 sk	x	x

x = stock product

Flow CS



Flow CS is a high-strength cement-based floor screed. Especially suitable for polyurethane and epoxy-coated subfloor structures in homes, commercial premises, hospitals, offices and schools. The product does not contain fiber that would hinder coating work. When using acrylic coatings, check product compatibility with the coating manufacturer. Flow CS can be applied by trowel or by pumping. With a minimum layer thickness of 5 mm, the product can be used for alkali protection. Layer thickness 2 - 30 mm (partial levelling max. 50 mm). Maximum grain size 0.6 mm. A low-alkali (pH < 11). For indoor use.



GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841202475	FLOW CS 20 KG	20247	20 kg	48 sk	x	-
6416841338174	FLOW CS 1000 KG	33817	1000 kg		x	-

x = stock product

Flow FS



A cost-effective and versatile fiber-reinforced, cement-based floor screed. Suitable for a wide range of adhesive carpeting in public areas and for floor levelling in residential construction, either hand-applied or pumped. Can be used for the surface casting of thermal floors and floating floor systems in public spaces and residential buildings, and for levelling cavity slabs and concrete floors. Flow FS is low alkaline. Compressive strength C 20. Layer thickness 4 - 50 mm (partial levelling max. 80 mm). Maximum grain size 1.2 mm. For indoor use. Bulk delivery pricing according to a separate offer.

GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841202451	FLOW FS 20 KG	20245	20 kg	48 sk	x	-
6416841331458	FLOW FS 1000 KG	33145	1000 kg		x	-
	FLOW FS BULK DELIVERY	33845	1 kg		-	-

x = stock product



Flow GS 3.0 mm Gypsum floor mass



Gypsum-based, pumpable, easy-to-level floor compound with excellent workability and flow properties. Application: Especially suitable for underfloor heating systems and thicker screed layers. Maximum aggregate size: 3.0 mm. Layer thickness: 20–80 mm (locally up to 100 mm). Dry consumption: approx. 1.8 kg/m²/mm.

GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841331496	FLOW GS 3.0 MM GYPSUM FLOOR MASS 1000 KG	33149	1000 kg		x	-

x = stock product

Flow Primer



Brush-on primer for surface pretreatment before floor levelling. Flow Primer improves the adhesion of floor levelling compounds, reduces or eliminates the formation of air bubbles, and prevents water contained in the floor levelling compound from being absorbed into the surface too quickly. Usage: Hollow-core slab surfaces: about 10 m²/l. Cast-in-place concrete surfaces: about 5 m²/l. Plaster and wood surfaces: about 7 m²/l. Mixing ratio: Concrete surfaces and surfaces with cement-based levelling: 1 part Flow Primer, 3 parts water. Surfaces that cannot withstand moisture, e.g. plaster and wood surfaces: Use undiluted. For indoor use.



GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841769053	FLOW PRIMER 10 L	76905	10 l	50 prk	x	-

x = stock product

Primer PLUS



Brushable special bonding primer for the pre-treatment of non-absorbent surfaces (such as tile, glass, or steel) before levelling. Consumption: approx. 150 g/m². The product is ready to use and must not be diluted. For indoor use only.



GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841769060	PRIMER PLUS 5 KG	76906	5 kg	80 prk	x	-

x = stock product

Elevation mark

Elevation mark with adhesive tape for floor levelling compounds. Scale 10-65 mm or 10-100 mm. Sold in bags of 100.



GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841259332	ELEVATION MARK 65 MM	25933	1 pcs		x	-
6416841259363	ELEVATION MARK 100 MM	25936	1 pcs		x	-

x = stock product

Edge strip 30x30x2000 mm



Fescon Edge strip is a self-adhesive polyester strip for bordering floor levelling compounds. With the Edge strip, the pumped areas can be restricted to the required size, also suitable for making door stops. Installation on a cleaned and primed base. Package size 25 pcs. / bag (50 m).

GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841259394	EDGE STRIP 30x30x2000 MM	25939	50 m		x	-

x = stock product

Bordering strip 8x150 mm



A bordering strip for separating floating floor structures from vertical structures. The Bordering strip has a ready-fitted overlapping plastic sheet with adhesive tape, to be installed over separation fabric or insulation. The back of the Bordering strip has a fastening tape for wall mounting. Roll length 25 m. Sales lot 4 rolls/package (100 m).

GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841259387	BORDERING STRIP 8x150 MM	25938	100 m		x	-

x = stock product



Separation fabric 1.5x50 m

Breathable Separation fabric for separating floating floor structures, if the base is of weak concrete, a floor base, or insulation. Diffusion open, separation fabric, made of polypropylene, through which the water in the floor levelling compound cannot penetrate. Both long sides of the separation fabric have an overlapping tape ready-fitted, overlapping according to alignment lines.

GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841259370	SEPARATION FABRIC 1.5x50 M	25937	75 m ²		x	-

x = stock product

7 TILING PLASTER AND WATERPROOFING PRODUCTS

Waterproofing compound

1-component, rollable, fiber-reinforced waterproofing membrane for indoor use. Suitable for waterproofing floors and walls. Consumption approx. 0.7 l/m² on walls and 1.0 l/m² on floors. Accessories to be used with the waterproofing membrane: Fescon Adhesion promoter, Drain flange 300x300 mm fibre or Drain flange KL-B, Waterproofing accessories FS and Waterproofing strip 0.10x25 m or 0.2x25 m. Certified VTT-C-870-06, ETA approved, CE marked and part of the M1-approved Waterproofing system.



GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841259097	WATERPROOFING COMPOUND 3 L	25909	3 l	144 prk	x	x
6416841259035	WATERPROOFING COMPOUND 12 L	25935	12 l	40 prk	x	x

x = stock product

Waterproofing compound WS



Fast-drying, single-component indoor waterproofing compound that can be rolled or sprayed. Suitable for the waterproofing of floors and walls. Consumption about 0.7 l/m² on walls and floors. Accessories used with Waterproofing compound WS: Fescon Primer KP, Drain flange KL-B, Waterproofing accessories (FS and VE series), Waterproofing strip 0.1x25 m fibre and Waterproofing strip 0.2x25 m fibre. ETA- and M1-approved, with CE marking.



GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841769091	WATERPROOFING COMPOUND WS 3 L / 4.5 KG	76909	3 l	100 prk	x	-
6416841769145	WATERPROOFING COMPOUND WS 12 l / 18 KG	76914	12 l	32 prk	x	-

x = stock product

Fescoseal A+B



Fescoseal A+B is a two-component waterproofing compound designed for both indoor and outdoor use. It is suitable for waterproofing floors, walls, balconies, terraces, and unheated outdoor saunas, as well as for air-tightness repairs when used together with Fescon Sealing tape VE-N or FS-N. Consumption: approx. 1.3 kg/m² for indoor use and 3.2 kg/m² for outdoor use. Accessories used with Fescoseal A+B: Bonding Primer KP, Drain Flange KL-B, and Waterproofing Accessories VE or FS series. Certified by Eurofins Expert Services Oy, product certificate No. C-11838-16. CE-marked and part of the M11-approved Fescoseal A+B Waterproofing system.



GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841769008	FESCOSEAL A (powder component)	76900	10 kg	40 prk	x	-
6416841769084	FESCOSEAL B (liquid component)	76908	10 kg	40 prk	x	-

x = stock product

Adhesion promoter



Water-soluble primer for pretreatment of the base. The primer is used as part of the Fescon waterproofing system. Also suitable for all Fescon floor leveling compounds and wall filler, to improve the stress category of wall fillers. Improves adhesion to the substrate, absorbs dust, prevents the formation of air bubbles, and prevents the water in the leveling compound from being absorbed too quickly into the substrate. For indoor use. Pack size 5 x 3 ltr / box and 10 x 1 ltr / box.



GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841259110	ADHESION PROMOTER 1 L	25911	1 l		x	x
6416841259103	ADHESION PROMOTER 3 L	25910	3 l		x	x
6416841259042	ADHESION PROMOTER 10 L	25904	10 l	40 prk	x	x

x = stock product

Primer KP



Water-soluble primer for pretreatment of substrate in the Fescon WS and Fescoseal A+B waterproofing systems. Consumption: dense surfaces approx. 10 m²/l, porous surfaces approx. 6 m²/l. Mixing ratio: concrete and cement-based leveling compounds: 1 part primer and 3 parts water, building boards suitable for wet spaces: not to be thinned. For indoor use.



GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841769039	PRIMER KP 1 L	76903	1 l	100 prk	x	-
6416841769046	PRIMER KP 5 L	76904	5 l	100 prk	x	-
6416841769015	PRIMER KP 10 L	76901	10 l	40 prk	x	-

x = stock product


Waterproofing strip

Fiber-reinforced waterproofing strip used in Fescon WS- and Waterproofing systems for reinforcing corners, edges, and joints. The 0.1 x 25 m waterproofing strip can be used for penetrations with a diameter of 10–40 mm. The 0.2 x 25 m waterproofing tape is suitable for penetrations with a diameter of 55–110 mm. The 1.0 x 10 m Waterproofing fabric can also be used for making penetrations and reinforcement pieces. When the waterproofing fabric is used as a drain collar, it is only compatible with the Fescon Waterproofing system. Tape size: 0.10 x 25 m, package size 10 rolls/carton, or 0.20 x 25 m, package size 10 rolls/carton. Also available: Waterproofing fabric 1.0 x 10 m. Not suitable for the Fescoseal A+B Waterproofing system.



GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841259868	WATERPROOFING STRIP 0.1 M x 25 M FIBER	25986	1 roll		x	x
6416841259875	WATERPROOFING STRIP 0.2 M x 25 M FIBER	25987	1 roll		x	x
6416841259059	WATERPROOFING MEMBRANE 1M x 10 M 10 M2	25905	1 roll		x	x

x = stock product



Drain flange 300x300 mm fibre

Fibre floor drain sealing material for Fescon waterproofing systems. Also suitable as a through-hole flange for a 110 mm sewer pipe. The drain flange size is 300 x 300 mm. Sold in packages of 2 or 10. Two required for one drain. Not suitable for Fescon WS or Fescoseal waterproofing systems.

GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841259141	DRAIN FLANGE 300x300 MM FIBRE (2 PCS/BAG)	25914	2 pcs		x	x
6416841259424	DRAIN FLANGE 300x300 MM FIBRE (10 PCS/BAG)	25942	10 pcs		x	x

x = stock product



Drain flange KL-B

The self-adhesive butyl drain flange can be used with all Fescon waterproofing systems. The surface is reinforced with a polypropylene material. Drain flange size 37 x 37 cm. Package size: 10 pcs per box. Use: For drains that are fully covered with a butyl drain flange before the clamping ring is installed.

GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841259530	DRAIN FLANGE KL-B	25953	1 pcs		x	-

x = stock product

Waterproofing accessories FS

Waterproofing accessories FS can be used in all Fescon waterproofing systems. The product family includes: waterproofing strip, inner and outer corners, and through-hole flanges. The waterproofing compounds are made of butyl, with a surface made of polypropylene fabric for extra strength. The through-hole flange must be one size smaller than the hole to be waterproofed. FS-L 70 is suited for a 110 mm sewer pipe, FS-L 55 for 75 mm pipes, FS-L 40 for tap angle boxes and 50 mm pipes, FS-L 23 for 32 mm pipes, and FS-L 10 for smaller through-holes. Waterproofing strip FS-N is 120 mm wide. The length of inner and outer corners is 135 mm in both directions; the total width of the floor and wall is 120 mm.



GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841259431	SEALING TAPE FS-N 25 M	25943	1 roll		x	-
6416841259448	OUTSIDE CORNER FS-U	25944	1 pcs		x	-
6416841259479	INSIDE CORNER FS-S	25947	1 pcs		x	-
6416841259486	WALL PACKING FS-L 10	25948	1 pcs		x	-
6416841259790	WALL PACKING FS-L 23	25979	1 pcs		x	-
6416841259493	WALL PACKING FS-L 40	25949	1 pcs		x	-
6416841259783	WALL PACKING FS-L 55	25978	1 pcs		x	-
6416841259516	WALL PACKING FS-L 70	25951	1 pcs		x	-
6416841259530	DRAIN FLANGE KL-B	25953	1 pcs		x	-

x = stock product

Waterproofing accessories VE

Waterproofing accessories VE can be used in all Fescon WS and Fescoseal waterproofing systems. The product family includes: waterproofing strip, inner and outer corners, and through-hole flanges. The waterproofing compounds are made of butyl, with a surface made of polypropylene fabric for extra strength. The through-hole flange must be one size smaller than the hole to be waterproofed. VE-L 70 is suited for a 110 mm sewer pipe, VE-L 55 for 75 mm pipes, VE-L 40 for tap angle boxes and 50 mm pipes, VE-L 23 for 32 mm pipes, and VE-L 10 for smaller through-holes. Waterproofing strip VE-N is 120 mm wide. The length of inner and outer corners is 135 mm in both directions; the total width of the floor and wall is 120 mm.



GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841259547	SEALING TAPE VE-N 25 M	25954	1 roll		x	-
6416841259554	OUTSIDE CORNER VE-U	25955	1 pcs		x	-
6416841259561	INSIDE CORNER VE-S	25956	1 pcs		x	-
6416841259578	WALL PACKING VE-L 10	25957	1 pcs		x	-
6416841259806	WALL PACKING VE-L 23	25980	1 pcs		x	-
6416841259585	WALL PACKING VE-L 40	25958	1 pcs		x	-
6416841259813	WALL PACKING VE-L 55	25981	1 pcs		x	-
6416841259592	WALL PACKING VE-L 70	25959	1 pcs		x	-
6416841259530	DRAIN FLANGE KL-B	25953	1 pcs		x	-

x = stock product



Tile adhesive plaster VSL



A non-sag, flexible adhesive plaster for fastening ceramic and clinker tiles to concrete, tile, plastic and painted bases. For outdoor and indoor use. Usage: 2-3 kg/m². The properties of the plaster meet the C2, S1 and T requirements.

GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841631060	TILE ADHESIVE PLASTER VSL 5 KG	63106	5 kg		x	x
6416841203021	TILE ADHESIVE PLASTER VSL 20 KG	20302	20 kg	48 sk	x	x

x = stock product

Tile adhesive plaster ILL



Adhesive plaster particularly designed for large floor tiles on concrete, plastic and painted bases. Enables full plaster adhesion of a large tile. Suitable for both indoor and outdoor use. Usage: 3-6 kg/m². The properties of the plaster meet the C2 and S1 requirements.



GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841203014	TILE ADHESIVE PLASTER ILL 20 KG	20301	20 kg	48 sk	x	x

x = stock product

Tile adhesive plaster SS2



For fixing ceramic tiles on deformation-prone surfaces, e.g. tiling for sheet metal bathrooms. Suitable for fixing natural stones. Usage: 2-3 kg/m². The properties of the plaster meet the C2 and S2 requirements.



GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841203038	TILE ADHESIVE PLASTER SS2 20 KG	20303	20 kg	48 sk	x	-

x = stock product

Plaatimissegu RSL Rapid



NEW!

Valumatu ja väga kiiresti tugevnev renoveerimisliim keraamiliste põrand- ja seinaplaatide kinnitamiseks. Seinäplaadid võib vuukida umbes 2 tunni ja põrandaplaadid umbes 4 tunni möödumisel. Segu vastab C1F, S1 ja T nõuetele. Siseroomides kasutamiseks.



GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841203069	TILE ADHESIVE PLASTER RSL RAPID 20 KG	20306	20 kg	48 sk	-	-

x = stock product



Tile seaming plaster SML



Fescon Tile Seaming Plaster SML is a dry mortar with a cement binder, max. grain size 0.3 mm. Certificate No. VTT-C-870-06.

GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841671004	TILE SEAMING PLASTER SML WHITE 3 KG	67100	3 kg		x	-
6416841204004	TILE SEAMING PLASTER SML WHITE 15 KG	20400	15 kg	48 sk	x	-
6416841671011	TILE SEAMING PLASTER SML MARBLE WHITE 3 KG	67101	3 kg		x	-
6416841204011	TILE SEAMING PLASTER SML MARBLE WHITE 15 KG	20401	15 kg	48 sk	x	-
6416841671028	TILE SEAMING PLASTER SML GREY 3 KG	67102	3 kg		x	-
6416841204028	TILE SEAMING PLASTER SML GREY 15 KG	20402	15 kg	48 sk	x	-
6416841671035	TILE SEAMING PLASTER SML LIGHT GREY 3 KG	67103	3 kg		x	-
6416841204035	TILE SEAMING PLASTER SML LIGHT GREY 15 KG	20403	15 kg	48 sk	x	-
6416841671042	TILE SEAMING PLASTER SML DARK GREY 3 KG	67104	3 kg		x	-
6416841204042	TILE SEAMING PLASTER SML DARK GREY 15 KG	20404	15 kg	48 sk	x	-
6416841671073	TILE SEAMING PLASTER SML LIGHT BEIGE 3 KG	67107	3 kg		x	-
6416841204073	TILE SEAMING PLASTER SML LIGHT BEIGE 15 KG	20407	15 kg	48 sk	x	-
6416841671127	TILE SEAMING PLASTER SML BEIGE 3 KG	67112	3 kg		x	-
6416841204127	TILE SEAMING PLASTER SML BEIGE 15 KG	20412	15 kg	48 sk	x	-
6416841671110	TILE SEAMING PLASTER SML BLACK 3 KG	67111	3 kg		x	-
6416841204110	TILE SEAMING PLASTER SML BLACK 15 KG	20411	15 kg	48 sk	x	-
6416841671134	TILE SEAMING PLASTER SML BLACKGREY 3 KG	67113	3 kg		x	-
6416841204134	TILE SEAMING PLASTER SML BLACKGRAY 15 KG	20413	15 kg	48 sk	x	-

x = stock product

Sanitary silicone

One-component silicone mass for expansion joints and sealing.



GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841259134	SANITARY SILICONE COLORLESS	25913	1 pcs		x	-
6416841259165	SANITARY SILICONE WHITE	25916	1 pcs		x	-
6416841260109	SANITARY SILICONE MARBLE WHITE	26010	1 pcs		x	-
6416841259202	SANITARY SILICONE GREY	25920	1 pcs		x	-
6416841260055	SANITARY SILICONE LIGHT GREY	26005	1 pcs		x	-
6416841259219	SANITARY SILICONE DARK GREY	25921	1 pcs		x	-
6416841260017	SANITARY SILICONE LIGHT BEIGE	26001	1 pcs		x	-
6416841260123	SANITARY SILICONE BEIGE	26012	1 pcs		x	-
6416841260130	SANITARY SILICONE BLACK	26013	1 pcs		x	-
6416841260116	SANITARY SILICONE BLACK GREY	26011	1 pcs		x	-

x = stock product

8 PLASTERS



Lime-cement plaster KS 10/90

Adhesive plaster. A spray-applied lime-cement plaster for adhesion plastering. Also suitable for manual application. Usage: adhesion 6 - 10 kg/m²/mm. The minimum delivery batch is 1 large bag or 3 pallets of small bags.

GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841530554	LIME-CEMENT PLASTER KS 10/90 3 MM 25 KG	53055	25 kg	48 sk	-	-
6416841330550	LIME-CEMENT PLASTER KS 10/90 3 MM 1000 KG	33055	1000 kg		-	-

x = stock product



Lime-cement plaster KS 35/65

Adhesive plaster and filling plaster. A spray-applied lime-cement plaster for adhesion plastering and filling. Also suitable for manual application. Usage: adhesion plaster 6 - 10 kg/m²/mm, filling plaster 15 - 30 kg/m²/mm. Also available to order with a maximum grain size of 1.2 mm.

GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841530561	LIME-CEMENT PLASTER KS 35/65 3 MM 25 KG	53056	25 kg	48 sk	x	-
6416841330567	LIME-CEMENT PLASTER KS 35/65 3 MM 1000 KG	33056	1000 kg		-	-

x = stock product

Lime-cement plaster KS 50/50



A filling plaster. A lime-cement plaster for filling and finishing. Also suitable for manual application. Usage: filling approx 30 kg/m²/mm. Maximum grain size 1.2 mm or 3.0 mm.



GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841560575	LIME-CEMENT PLASTER KS 50/50 1.2 MM 25 KG	56057	25 kg	48 sk	x	x
6416841360571	LIME-CEMENT PLASTER KS 50/50 1.2 MM 1000 KG	36057	1000 kg		-	-
6416841530578	LIME-CEMENT PLASTER KS 50/50 3 MM 25 KG	53057	25 kg	48 sk	x	x
6416841330574	LIME-CEMENT PLASTER KS 50/50 3 MM 1000 KG	33057	1000 kg		x	-

x = stock product

Lime-cement plaster KS 65/35



Finishing plaster. A spray-applied lime-cement finishing plaster. Also suitable for manual application. Grain size 3 mm also available to order. Usage: 6-10 kg/m².



GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841570611	LIME-CEMENT PLASTER KS 65/35 0.6 MM 25 KG	57061	25 kg	48 sk	x	-
6416841560612	LIME-CEMENT PLASTER KS 65/35 1.2 MM 25 KG	56061	25 kg	48 sk	x	-
6416841360618	LIME-CEMENT PLASTER KS 65/35 1.2 MM 1000 KG	36061	1000 kg		-	-

x = stock product



Lightweight lime-cement plaster KEV KS 35/65



A lime-cement-binder mineral render mortar containing mineral lightweight fillers, suitable for bonding, filling and finishing rendering. Also suitable for manual application. Usage: 1 mm layer 1.2 kg/m². Grain size 3 mm also available to order (only in 800 kg packages). Minimum delivery 3 big bags.

GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841253217	LIGHTWEIGHT LIME-CEMENT PLASTER KEV KS 35/65 1.2 MM 20 KG	25321	20 kg	48 sk	x	-

x = stock product



Lime-cement plaster HD KS 35/65 fibre

A fibre-reinforced adhesion and filling plaster with a low water absorption for 5-30 mm layer thicknesses. Also suitable for manual application. Usage 1.4 kg for a 1 mm layer. Maximum grain size 3 mm (available to order in 1.2 mm grain size).

GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841571014	LIME-CEMENT PLASTER KS 35/65 3 MM FIBRE 25 KG	57101	25 kg	48 sk	x	-
6416841371010	LIME-CEMENT PLASTER KS 35/65 3 MM FIBRE 1000 KG	37101	1000 kg		-	-

x = stock product



Lime-cement plaster HD KS 20/80 fibre

A fibre-reinforced adhesion and filling plaster with a low water absorption for 5-30 mm layer thicknesses. Also suitable for manual application. Usage 1.4 kg for a 1 mm layer. Maximum grain size 3 mm (available to order in 1.2 mm grain size).

GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841572011	LIME-CEMENT PLASTER HD KS 20/80 3 MM FIBRE 25 KG	57201	25 kg	48 sk	x	-
6416841372017	LIME-CEMENT PLASTER KS 20/80 3 MM FIBRE 1000 KG	37201	1000 kg		-	-

x = stock product

Lime plaster K100/1200

Basic plaster for the on-site preparation of lime-cement plaster by adding water and cement either as volume fractions or by weighing. The finished wet plaster is suitable for use in adhesion plastering or filling according to the amount of cement. The finished lime-cement plaster is suitable for both machine and manual application. Usage in adhesion plastering 5-10 kg/m² and in filling 15-30 kg/m².



GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841339010	LIME PLASTER K100/1200 0.6 MM 800 KG	33901	800 kg		-	-
6416841339102	LIME PLASTER K100/1200 1.5 MM 1000 KG	33910	1000 kg		-	-
6416841339119	LIME PLASTER K100/1200 4 MM 1000 KG	33911	1000 kg		-	-

x = stock product

Wet plaster

Fescon Wet plaster is a lime-based dry plaster from which ready-to-use wet plaster is prepared at a work site. With the Fescon special manufacturing method, the plaster has the good properties of traditional wet plaster. The maximum grain size is 0.6-4.0 mm. The finished wet plaster is suitable for use in adhesion plastering, filling and surface plastering according to the amount of cement. Suitable for mechanical and manual plastering.



GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841339010	LIME PLASTER K100/1200 0.6 MM 800 KG	33901	800 kg		-	-
6416841339102	LIME PLASTER K100/1200 1.5 MM 1000 KG	33910	1000 kg		-	-
6416841339119	LIME PLASTER K100/1200 4 MM 1000 KG	33911	1000 kg		-	-

x = stock product

9 PRODUCTS FOR THE REPAIR OF CONCRETE SURFACES AND INFRASTRUCTURE CONSTRUCTION

Repair concrete RKB



Fescon Repair concrete RKB is a multi-purpose, strength-rated, non-sag and fiber-reinforced special concrete that meets the requirements of EN 1504-3 structural repair material class R3. Repair concrete can be used for filling and patching concrete structures, repairing and coating floor, wall and roof surfaces and increasing the structural strength of concrete. Suitable for indoor and outdoor use. It is also suitable for use as cast concrete and sprayed concrete in applications where high strength and good weather-resistance are required. SILKO approved. Maximum grain size 3.0 mm. Strength class C30/37. Material usage approx. 2.0 kg/m²/mm. M approved.

GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841530073	REPAIR CONCRETE RKB 3 MM 25 KG	53007	25 kg	48 sk	x	x
6416841330055	REPAIR CONCRETE RKB 3 MM 1000 KG	33005	1000 kg		x	-

x = stock product



Repairing plaster KL 25+

Fibre-reinforced, polymer-modified cement-binding dry mortar. KL 25+ Repairing plaster can be used for patching holes in concrete structures, repairing and levelling floor and wall surfaces, and patching holes in roof surfaces in accordance with repair method 3.1 (manual mortar patching). Suitable for indoor and outdoor use. Largest grain size 1.2 mm. Adhesion strength R3. estimated usage: 1 mm layer 1.8 kg/m².

GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841430519	REPAIRING PLASTER KL 25+ 20 KG	43051	20 kg	48 sk	x	x

x = stock product

Repairing plaster KL 40+

Polymer-modified cement-binding dry mortar. KL 40+ Repairing plaster can be used for patching holes in concrete structures, repairing and levelling floor and wall surfaces, and patching holes in roof surfaces in accordance with repair method 3.1 (manual mortar patching). Suitable for indoor and outdoor use. The maximum grain size is 1.2 mm. Adhesion strength R3.



GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841430526	REPAIRING PLASTER KL 40+ 20 KG	43052	20 kg	48 sk	x	-

x = stock product

Overlevelling plaster Coarse YTLK

Fescon Overlevelling plaster Coarse is a polymer-modified, frost-resistant repair mortar for concrete surfaces. Levelling plaster is used for levelling concrete surfaces, closing pores and finishing, in accordance with repair method 3.1 (manual mortar patching) and/or 3.3 (injection). The maximum grain size is 1.2 mm.



GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841450814	OVERLEVELLING PLASTER COARSE YTLK 20 KG	45080	20 kg	48 sk	x	-

x = stock product

Overlevelling plaster YTL

A polymer-modified plaster with cement binder for the levelling and thin-layer plastering of lightweight aggregate and concrete block structures and concrete surfaces. Maximum grain size 0.6 mm. Levelling work 5-10 kg/m² (depending on how even the wall is). Thin-layer plastering 6-8 kg/m² / 2 layer applications.



GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841450821	OVERLEVELLING PLASTER YTL 20 KG	45082	20 kg	48 sk	x	-

x = stock product



Fescorapid



Special cement-based, fast-setting and fast-drying, versatile repair mortar. Application: For floor, wall, and ceiling surfaces. Suitable for both indoor and outdoor use. Maximum aggregate size: 0.6 mm. Layer thickness: 2–20 mm. Consumption: 1.5 kg/m²/mm. See the price at Product group 6. Floor levelling products.

GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841631015	FESCORAPID 5 KG	63101	5 kg		x	x
6416841202352	FESCORAPID 20 KG	20235	20 kg	48 sk	x	-

x = stock product



Fescofine



Special cement-based, fast-setting and fast-drying versatile finishing compound for floor, wall, and ceiling surfaces. Suitable for both indoor and outdoor use. Maximum grain size: 0.1 mm.

See the price at Product group 6. Floor levelling products.

GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841202390	FESCOFINE 20 KG	20239	20 kg	48 sk	x	-

x = stock product



Bolting plaster SR

Pumpable special plaster with cement binder for bolting during quarrying. Also available in a sulphate-resistant grade. Used in tunnel excavation, and rock and infrastructure construction. CE-marked, ready-to-use dry mix that meets quality and strength requirements. Minimum delivery quantity for big bags is 3 bags.

GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841533357	BOLTING PLASTER SR 25 KG	53335	25 kg	48 sk	x	-
6416841333353	BOLTING PLASTER SR 800 KG	33335	800 kg		-	-

x = stock product

Winterbolting plaster SR

Pumpable special plaster for reinforcement work in rock construction. Can be used in winter conditions down to -10°C. The binder is made of sulphate-resistant cement. Used in tunnel excavation, and rock and infrastructure construction. CE-marked, ready-to-use dry mix that meets quality and strength requirements. Minimum delivery 3 pallets.



GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841533319	WINTERBOLTING PLASTER SR 25 KG	53331	25 kg	48 sk	-	-

x = stock product

Rock paint FRP Cave paint **NEW!**

Fescon Rock paint FRP Cave paint is a cement-bonded spray paint with a very low spreading rate (0.5–0.8 kg/m²) and excellent covering properties. Suitable for spray painting shotcrete and concrete surfaces to increase lightness in tunnels, caves and parking facilities. The rock paint creates a finished and highly reflective surface with just one application. Standard colour is white, other colours available according to the Fescon colour chart. Minimum delivery 3 pallets of small sacks.



GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841430601	FESCON ROCK PAINT FRP CAVE PAINT 235 20 KG	43060	20 kg	48 sk	-	-
6416841103635	FESCON ROCK PAINT FRP CAVE PAINT FESCON COLORS 20 KG	43061	20 kg	48 sk	-	-

x = stock product

SILKO Corro SKC C35/45

Special concrete for demanding casting applications with salt and frost stress. Largest grain size 10 mm. Strength class C 35/45. SILKO-approved. Minimum delivery 3 big bags.

Outgoing product, check availability.



GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841333049	SILKO KORRO SKC C 35/45 10 MM 1000 KG	33304	1000 kg		-	-

x = stock product



SILKO Rapid Corro SPC C35/45

Rapidly hardening special plaster for demanding applications. Largest grain size 3 mm. Strength class C 35/45. SILKO-approved. Minimum delivery 3 pallets of small sacks.

GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841533050	SILKO RAPID CORRO SPC 35/45 3 MM 25 KG	53305	25 kg	48 sk	-	-

x = stock product



Adhesive plaster TL

The Fescon Adhesive Plaster is a cement-based, polymer-modified, cement-based dry mortar with additives. The maximum grain size is 0.6 mm. The smallest delivery batch of a 5 kg container is 4 containers.

GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841631268	ADHESIVE PLASTER TL 5 KG	63126	5 kg		x	-
6416841450265	ADHESIVE PLASTER TL 25 KG	45026	25 kg	48 sk	x	-

x = stock product



Korrogard R 0.6 mm

A polymer-modified, fibre-reinforced levelling and protective plaster for concrete structures. SILKO-approved.

GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841533067	KORROGARD R 0.6 MM 25 KG	53306	25 kg	48 sk	x	-

x = stock product

Korrogard R 1.2 mm

A polymer-modified, fibre-reinforced repair plaster for concrete structures. SILKO-approved.



GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841533029	KORROGARD R 1.2 MM 25 KG	53302	25 kg	48 sk	x	-

x = stock product

Korroshot D KSD 5.0 mm

A polymer-modified, fibre-reinforced special concrete for shotcreting using the dry spray method. SILKO-approved. Minimum delivery 3 big bags or 3 pallets of small sacks.



GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841533074	KORROSHOT D KSD 5 MM 25 KG	53307	25 kg	48 sk	-	-
6416841333100	KORROSHOT D KSD 5 MM 1000 KG	33310	1000 kg		-	-

x = stock product

Quick Drill 45

The Fescon Quick Drill concept is a new system for accelerating borehole concreting (grouting) in ore prospecting. The system consists of fast-setting concrete, Ciment Fondu Lafarge, and a Quick Drill additive package, by means of which the characteristics of the cement paste can be adjusted. Prices according to separate offer.



GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841631800	QUICK DRILL 45 2.5 L	63180	2,5 l		-	-
6416841533807	QUICK DRILL 45 20 L	53380	20 l		-	-

x = stock product

10 MINERAL COATINGS AND THIN PLASTER



Facade coating JSP 0.5



A polymer-modified coating with cement binder for brick and concrete surfaces. Maximum grain size 0.5 mm. Estimated usage: 4-6 kg/m² / two applications. Smallest manufacturing batch 100 kg/tint.

GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841450852	FACADE COATING JSP 0.5 MM COLOR 235 25 KG	45085	25 kg	48 sk	-	-
6416841015617	FACADE COATING JSP 0.5 MM FESCON COLORS 25 KG	45100	25 kg	48 sk	-	-

x = stock product



Facade coating JSP 1.5



A polymer-modified coating with cement binder for brick and concrete surfaces. Maximum grain size 1.5 mm. Estimated usage: 4-6 kg/m² / two applications. Smallest manufacturing batch 100 kg/tint.

GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841450869	FACADE COATING JSP 1.5 MM FESCON 235 25 KG	45086	25 kg	48 sk	x	-
6416841016065	FACADE COATING JSP 1.5 MM FESCON COLORS 25 KG	45150	25 kg	48 sk	-	-

x = stock product

Lime-cement coating KSP

A coloured, polymer-modified lime-cement coating that can be spray-applied. Suitable for coating lime-cement plaster and brick surfaces. Largest grain size 1.5 mm. Estimated usage: 4-6 kg/m² /two applications. Smallest manufacturing batch 200 kg/tint.



GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841451514	LIME-CEMENT COATING KSP 1.5 MM FESCON COLORS 25 KG	45151	25 kg	48 sk	-	-

x = stock product

Lime-cement coating JL

A spray-applied coloured lime cement finishing plaster. Other tints offered separately. Largest grain size 1.5 mm or 3.0 mm. Usage: 4-8 kg/m². Minimum manufacturing batch 1.5 mm 200 kg/tint and 3 mm 500 kg/tint.



GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841450166	LIME-CEMENT COATING JL 1.5 MM COLOR 235 25 KG	45016	25 kg	48 sk	-	-
6416841015075	LIME-CEMENT COATING JL 1.5 MM FESCON COLORS 25 KG	45200	25 kg	48 sk	-	-
6416841028495	LIME-CEMENT COATING JL 3.0 MM FESCON COLORS 25 KG	45017	25 kg	48 sk	-	-

x = stock product



Thin-layer compo plaster KRL

Coloured lime-cement plaster for the thin-layer plastering of brick surfaces. Suitable for both spray and manual application. Other colours offered separately. Largest grain size 1.5 mm. Estimated usage: 5-8 kg/m². Smallest manufacturing batch 500 kg/tint.

GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841017031	THIN-LAYER COMPO PLASTER KRL 1.5 MM FESCON COLORS 25 KG	45014	25 kg	48 sk	-	-

x = stock product



Antique plaster AL



Suitable for the coating, decorative coating and thin-layer plastering of concrete, sand-lime brick, burnt brick, lightweight aggregate block, sturdy concrete, levelling plaster, fibre plaster and cement levelling compound surfaces both indoors and outdoors. Maximum grain size 0.5 mm or 1.5 mm. Usage 3.5-5.5 kg/m²/ 2 applications. Colour white.

GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841530318	ANTIQUE PLASTER AL 0.5 MM 25 KG	53031	25 kg	48 sk	x	-
6416841530257	ANTIQUE PLASTER AL 1.5 MM 25 KG	53025	25 kg	48 sk	x	-

x = stock product



Socle and adjusting plaster SOL



For the levelling and two-layer plastering of lightweight aggregate block foundation walls and walls, and concrete surfaces. Maximum grain size 0.6 mm. Levelling work 5-10 kg/m² (depending on how even the wall is). Estimated usage: 1 mm layer 1.5 kg/m².

GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841530066	SOCLE AND ADJUSTING PLASTER SOL 25 KG	53006	25 kg	48 sk	x	x

x = stock product

Fibre plaster FL



Fibre plaster FL is a cement-based thin rendering mortar for mineral substrates, suitable for both indoor and outdoor use. It is used on concrete, brick, lightweight concrete, and block surfaces, and serves as a reinforcing mortar in the Fescoterm thermal insulation rendering system and Fescopanel board rendering system. The maximum aggregate size is 0.6 mm, and the layer thickness on mineral substrates is 2–10 mm. The calculated consumption is approximately 1.5 kg/m² per 1 mm layer. The surface can be finished with Fescon Silicone resin coating, Fescosan-Coating, Facade coating JSP or painted with Fescon facade paints.



GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841450210	FIBRE PLASTER FL 25 KG	45021	25 kg	48 sk	x	x

x = stock product

Levelling plaster TSL

A polymer-modified, cement-based plaster for levelling a thickly plastered precast element on the worksite. Maximum grain size 0.6 mm. Usage around approx. 1.6 kg/m²/mm. Stock product between 1 April and 30 September at the Hyvinkää factory.



GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841203106	LEVELLING PLASTER TSL 25 KG	20310	25 kg	48 sk	-	-

x = stock product

Adhesive mortar FLL

A polymer-modified plaster with cement binder. For the fastening of Fescoterm thin-layer plastering insulation. Maximum grain size 0.6 mm. Usage 4.5 kg/m². Also available in winter grade. Working temperature -10°C...+25°C.



GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841450234	ADHESIVE MORTAR FLL 25 KG	45023	25 kg	48 sk	x	-

x = stock product

11 MINERAL BASED FACADE PAINTS



Stone colour KS



Facade paint with lime cement binder for brick and rendered surfaces. Maximum grain size 0.1 mm. Usage 0.3-0.8 kg/m²/ 2 applications. Smallest manufacturing batch 100 kg/tint.

GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841450500	STONE COLOUR KS 235 WHITE 15 KG	45050	15 kg	48 sk	-	-
6416841001344	STONE COLOUR KS FESCON COLORS 15 KG	45055	15 kg	48 sk	-	-

x = stock product



Stone colour S



Facade paint with cement binder for concrete surfaces. Maximum grain size 0.1 mm. Usage 0.3-0.8 kg/m²/ 2 applications. Smallest manufacturing batch 100 kg/tint.

GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841450401	STONE COLOUR S 235 WHITE 20 KG	45040	20 kg	48 sk	-	-
6416841016577	STONE COLOUR S FESCON COLORS 20 KG	45045	20 kg	48 sk	-	-

x = stock product



Lime paint KM

The lime paint is produced in a traditional manner from hand-picked, charcoal-burnt limestone, as well as lime stored for more than a year and wet-quenched with clean water. Other colors are offered separately.

GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841762689	LIME PAINT KM WHITE 10 L	76268	10 l	44 prk	-	-

x = stock product

12 LIQUID FACADE AND INTERIOR PAINTS AND COATINGS

Protective paint

Liquid, water-soluble, alkali-resistant acrylate paint for protecting concrete surfaces against moisture and carbonisation. Usage 0.2-0.5 l/m²/application.



GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841761002	PROTECTIVE PAINT 18 L	76100	18 l	22 prk	-	-
	PROTECTIVE PAINT HR 1 Fescon colors	50300	18 l		-	-
	PROTECTIVE PAINT HR 2 Other colors	50301	18 l		-	-

x = stock product

Silicone resin primer MC

Solvent-free primer guaranteeing adhesion and even absorption for concrete, board and plaster surfaces, and paint surfaces in good condition. Primer for application before the Silicone resin coating and Fescosan coating. Usage 0.2 kg/m² (when thinned by 50%). Can be tinted.



GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841760500	SILICONE RESIN PRIMER MC 235 WHITE 15 KG	86050	15 kg	40 prk	x	-
	SILICONE-RESIN PRIMER MC HR 1 Fescon colors	50305	15 kg		-	-
	SILICONE-RESIN PRIMER MC HR 2 other colors	50306	15 kg		-	-

x = stock product



Silicone resin coating MC

A liquid, water-soluble silicone resin coating that is extremely breathable and water-resistant. This durable coating is suitable for new and previously coated stone surfaces on façades. It is also a coating product in the Fescoterm thin-layer plastering system. Usage: 2.2 - 4.2 kg/m² (depending on grain size). Grain sizes 1.5 and 3.0 mm also available to order. The silicone resin primer MC is used as the primer.

GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841760685	SILICONE RESIN COATING MC 2 MM 235 WHITE 25 KG	86068	25 kg	24 prk	x	-
	SILICONE RESIN COATING MC HR 1 Fescon colors	50310	25 kg		-	-
	SILICONE RESIN COATING MC HR 2 Other colors	50311	25 kg		-	-

x = stock product



Piirto Silicone resin coating

A liquid, water-soluble silicone resin coating that is extremely breathable and water-resistant. This durable coating is suitable for new and previously coated stone surfaces on façades. It is also a coating product in the Fescoterm thin-layer plastering system. Usage: 3.5 kg/m² (depending on grain size). The silicone resin primer MC is used as the primer.

GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841760678	PIIRTO SILICONE RESIN COATING 2 MM FESCON 235 WHITE 25 KG	86067	25 kg	24 prk	-	-
	PIIRTO SILICONE RESIN COATING HR 1 Fescon colors	50312	25 kg		-	-
	PIIRTO SILICONE RESIN COATING HR 2 Other colors	50313	25 kg		-	-

x = stock product

Fescosan-Coating

The silicone resin based Fescosan-Coating minimises dirt accumulation on the façade. Its homogeneous composition, optimal open time and good workability help achieve an extremely good result. The product is very water-resistant and weather-resistant and permeates water vapour. Fescosan offers good protection against algae and mould. Can be applied by rubbing and spraying. It is also a coating product in the Fescoterm thin-layer plastering system. Usage 2.2-4.2 kg/m² (depending on grain size). Also available in 1.5 and 3.0 mm grain sizes to order. The silicone resin primer MC is used as a primer.



GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841760814	FESCOSAN-COATING 2 MM 235 WHITE 25 KG	86081	25 kg	24 prk	x	-
	FESCOSAN-COATING HR 1 Fescon colors	50314	25 kg		-	-
	FESCOSAN-COATING HR 2 Other colors	50315	25 kg		-	-

x = stock product

Deeply penetrating primer

Primer for limiting and evening out the absorbency of porous substrates. Suitable for use on masonry, plastered, concrete and dispersion-painted surfaces, as well as on absorbent and durable old paint surfaces. Consumption approx. 0.2 l/m² per application.



GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841760661	DEEPLY PENETRATING PRIMER 10 L	76066	10 l	60 prk	x	-

x = stock product



Silicone resin paint

A high-quality, matte finish silicone resin paint for façades that is highly permeable to water vapour. Suitable bases include mineral plaster surfaces, durable façade surfaces, and textured plaster surfaces. Usage: 0.2 l/m²/application.

GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841760562	SILICONE RESIN PAINT 235 WHITE 12.5 L	76056	12,5 l	32 prk	x	-
	SILICONE RESIN PAINT HR 1 Fescon colors	50318	12,5 l		-	-
	SILICONE RESIN PAINT HR 2 Other colors	50319	12,5 l		-	-

x = stock product

Fescosan-Facade paint



A highly water-repellent, extremely high-quality façade paint with excellent opacity. Dries quickly into a rainproof coating even in adverse weather conditions, good colour fastness. Microporous and CO₂ permeable, weather and alkali resistant. Dirt-repellent and self-cleaning like bionic mechanisms (repels liquid, beading effect). The protection provided by the Fescosan-Facade paint prevents the growth of algae and fungi on the treated surface. Usage: 0.2 l/m²/application. Tinting net prices.

GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841760708	FESCOSAN-FACADE PAINT 235 WHITE 12.5 L	76070	12,5 l	32 prk	x	-
	FESCOSAN-FACADE PAINT HR 1 Fescon colors	50320	12,5 l		-	-
	FESCOSAN-FACADE PAINT HR 2 Other colors	50321	12,5 l		-	-

x = stock product

Silicate Primer

Colourless primer for the Silicate facade paint. Suitable for strengthening mineral bases. For evening the absorption of highly absorptive and sand-releasing surfaces. Does not contain solvents. Usage around 0.2-0.4 l/m² (thinned 2:1 with water)



GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841760616	SILICATE PRIMER 10 L	76061	10 l	60 prk	x	-

x = stock product

Silicate facade paint

A high-quality potassium silicate based façade paint. Effective coverage. A silicate façade paint forms an extremely weather-resistant façade coating with good water vapour permeability. Suitable bases are masonry walls, previously plastered surfaces, and durable, previously silicate-coated surfaces. Usage: around 0.18-0.25 l/m²/application.



GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841760623	SILICATE FACADE PAINT 12.5 L	76062	12,5 l	32 prk	x	-
	SILICATE FACADE PAINT HR 1 Fescon colors	50322	12,5 l		-	-
	SILICATE FACADE PAINT HR 2 Other colors	50323	12,5 l		-	-

x = stock product



Silicate interior paint **NEW!**

High-quality and highly opaque SOL silicate-based interior paint. Excellent water vapor permeability ($S_d < 0.01$ m). Suitable substrates include all common mineral-based structures, standard plaster and leveling compound surfaces, as well as previously painted surfaces. Excellent abrasion resistance. Consumption approx. 0.125 l/m^2 per coat. Tintable in light shades. Gloss level: fully matte.

Tinting prices are net prices.


GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841760302	SILICATE INTERIOR PAINT WHITE 12.5 L	76030	12,5 l	32 prk	x	-
	SILICATE INTERIOR PAINT HR 1 Fescon colors	50330	12,5 l		-	-
	SILICATE INTERIOR PAINT HR 2 Other colors	50331	12,5 l		-	-

x = stock product

13 FESCOTERM SILICATE BOARDS AND PLASTERING ACCESSORIES

Silicate board SKL **NEW!**

Non-combustible, fibre-free and mineral-based thermal insulation board made from natural materials for interior insulation. Stock sizes: 60 × 39 × 5 cm and 60 × 39 × 10 cm. Other sizes available on request. Custom order products are priced separately.



GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841721013	SILICATE BOARD SKL 60x39x5 CM, 1.87 M2/PACK	72101	1 pkt	18 pkt	x	-
6416841721020	SILICATE BOARD SKL 60x39x10 CM, 1.4 M2/PACK	72102	1 pkt	12 pkt	x	-
6416841721037	SILICATE BOARD SKL 60x39x6 CM, 28.08 M2/PALLET	72103	1 pallet	12 pkt	-	-
6416841721044	SILICATE BOARD SKL 60x39x8 CM, 21.6 M2/PALLET	72104	1 pallet	18 pkt	-	-
6416841721051	SILICATE BOARD SKL 60x39x12 CM, 14.04 M2/PALLET	72105	1 pallet	12 pkt	-	-
6416841721068	SILICATE BOARD SKL 60x39x14 CM, 11.23 M2/PALLET	72106	1 pallet	12 pkt	-	-
6416841721075	SILICATE BOARD SKL 60x39x16 CM, 9.83 M2/PALLET	72107	1 pallet	12 pkt	-	-
6416841721112	SILICATE BOARD SKL 60x39x18 CM, 8.42 M2/PALLET	72111	1 pallet	12 pkt	-	-
6416841721129	SILICATE BOARD SKL 60x39x20 CM, 8.42 M2/PALLET	72112	1 pallet	12 pkt	-	-

x = stock product

Silicate jamb board 500 x 250 x 15 mm **NEW!**

Non-combustible, fibre-free and mineral-based thermal insulation board made of calcium silicate for window reveals in the silicate board system.



GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841721082	SILICATE JAMB BOARD 500x250x15 MM, 20 PCS/BOX	72108	1 box	40 ltk	-	-

x = stock product

Adhesive and surface render KPL **NEW!**

Lime-cement-based, sulfate-resistant Adhesive and surface render KPL for silicate boards.

GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841721105	ADHESIVE AND SURFACE RENDER KPL 20 KG	72110	20 kg	48 sk	-	-

x = stock product




Permabase plastering board

Used in Fescopanel board plastering as a baseboard for plastering. For outdoor and indoor use. Grey colour.

GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock

x = stock product



Side moulding for board plastering without mesh 2,5 m

Used in Fescopanel board plastering at the side edges of the board. Length 2500 mm. 20 pcs./box

GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841502070	SIDE MOULDING FOR BOARD PLASTERING WITH MESH 2.5 M	50207	1 pcs		x	-

x = stock product

Side moulding for board plastering without mesh

Used in Fescopanel board plastering at the side edges of the board. Length 2500 mm.

10 pcs./box



GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841501431	SIDE MOULDING FOR BOARD PLASTERING WITHOUT MESH 2.5 M	50143	1 pcs		x	-

x = stock product

Bottom moulding for board plastering with mesh

Used in Fescopanel board plastering at the bottom edge of the board. Length 2500 mm.

20 pcs./box



GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841501554	BOTTOM MOULDING FOR BOARD PLASTERING WITH MESH 2.5 M	50155	1 pcs		x	-

x = stock product


Top moulding for board plastering

Used in Fescopanel board plastering at the top edge of the board. Length 2500 mm. 20 pcs/bundle. Colour white.



GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841501288	TOP MOULDING FOR BOARD PLASTERING 2.5 M	50128	1 pcs		x	-

x = stock product



Expansion joint with fibreglass mesh

The moulding is used as an expansion joint profile in plastering. Profile depth 6 mm. Length 2500 mm. A package contains 10 pcs.

GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841501547	EXPANSION JOINT WITH MESH NARROW	50154	1 pcs		x	-

x = stock product



Expansion joint with fibreglass mesh

The moulding is used as an expansion joint profile in plastering for 5-25 mm wide movement joints. Length 2500 mm. A package contains 10 pcs.

GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841501943	EXPANSION JOINT WITH MESH WIDE	50194	1 pcs		x	-
6416841501974	EXPANSION JOINT ANGLE	50197	1 pcs		x	-

x = stock product



Ventilation profile for board plastering


Used in Fescopanel board plastering as a ventilation profile at the bottom of the wall. Dimensions: 25 x 25 x 2500 mm/20 pcs in a bundle or 30 x 90 x 2500 mm/10 pcs in a bundle.

GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841501752	VENTILATION PROFILE FOR BOARD PLASTERING 25 MM 2.5 M	50175	1 pcs		x	-
6416841501769	VENTILATION PROFILE FOR BOARD PLASTERING 90 MM 2.5 M	50176	1 pcs		x	-

x = stock product

Angle guide profile 5 mm

Used for reinforcing outer corners in thin-layer plastering. Length 2500 mm 15 pcs./box.




GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841501837	ANGLE GUIDE PROFILE 5 MM 2.5 M	50183	1 pcs		x	-

x = stock product

Socle moulding with mesh 6 mm

The PVC socle moulding with mesh is used as the starting strip in thin-layer plastering. Length 2500 mm. A package contains 25 pcs. Smallest delivery batch one package.



GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841040718	SOCLE MOULDING WITH MESH 6 MM 2.5 M	50177	1 pcs		x	-

x = stock product

Socle moulding 10 mm for thin-layer plastering

Used in thin-layer plastering as a starting and edge molding. Length 2.5 m. 25 pcs./box.



GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841501530	SOCLE MOULDING 10 MM 2.5 M	50153	1 pcs		x	x

x = stock product




Socle moulding 8 mm for thin-layer plastering with mesh

A PVC starting strip, length 2000 mm.

GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841501998	SOCLE MOULDING 8 MM FOR THIN-LAYER PLASTERING WITH MESH	50199	1 pcs		x	-

x = stock product




Water bar for thin plaster applications

Used as a water bar on the upper parts of thin plaster walls and under the water dampers of windows. Length 2500 mm. 10 pcs. / box.

GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841501981	WATER BAR FOR THIN PLASTER APPLICATIONS 2.5 M	50198	1 pcs		x	-

x = stock product



Bordering moulding with mesh 6 mm


Used in Fescopanel board plastering, for example for separation or mirroring. Length 2500 mm. 50 pcs./box

GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841501639	BORDERING MOULDING WITH MESH 6 MM 2.5 M	50163	1 pcs		-	-

x = stock product

Fibreglass mesh

7 mm x 7 mm, width 1000 mm. The fibreglass mesh is used in board and thin-layer plastering on wall surfaces to strengthen the plastering surface. Can also be used with floor levelling compounds. Alkali-protected. One roll contains 50 m².




GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841500380	FIBREGLASS MESH 1000 MM 50 M ²	50038	1 roll	24 rll	x	x

x = stock product

Corner bead 100 x 150 mm

Used for corner reinforcement in thin-layer plastering. Length 2500 mm. 50 pcs/bundle. Smallest delivery batch one bundle.




GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841500502	CORNER BEAD 100x150 MM 2.5 M	50050	1 pcs		x	x

x = stock product

Corner bead roll 90 x 110 mm

Used for corner reinforcement in thin-layer plastering. Angle can be freely adjusted between 0 and 180 degrees. Length 50 lineal metres. Smallest delivery batch one box.



GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841501561	CORNER BEAD ROLL 90 x 110 MM / 50 M	50156	1 roll		x	-

x = stock product

Stick-on corner moulding 6 mm



Used for finishing window frames in thin-layer plastering. The moulding is fastened to the window or door frame using the included adhesive tape. A protective plastic sheet can be easily fastened to the frame moulding with adhesive tape. Length 2600 mm 30 pcs. in a package.

GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841501844	STICK-ON CORNER MOULDING 6 MM 2.6 M	50184	1 pcs		-	-

x = stock product

Stick-on corner moulding 10 mm




Used for finishing window frames in thin-layer plastering. The moulding is fastened to the window or door frame using the included adhesive tape. A protective plastic sheet can be easily fastened to the frame moulding with adhesive tape. Length 2600 mm. A package contains 60 pcs.

GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841500601	STICK-ON CORNER MOULDING 10 MM WHITE 2.6 M	50060	1 pcs		x	x

x = stock product

Stick-on corner moulding with mesh



Used for finishing window frames in thin-layer plastering. The moulding is fastened to the window or door frame using the included adhesive tape. A protective plastic sheet can be easily fastened to the frame moulding with adhesive tape. Length 2600 mm. A package contains 50 pcs.

GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841501509	STICK-ON CORNER MOULDING WITH MESH WHITE 2.6 M	50150	1 pcs		x	-

x = stock product

Stick-on corner moulding 9 mm grey

Used for finishing window frames in thin-layer plastering. The moulding is fastened to the window or door frame using the included adhesive tape. A protective plastic sheet can be easily fastened to the frame moulding with adhesive tape. Length 2600 mm. 60 pcs. in a package.




GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841501578	STICK-ON CORNER MOULDING 9 MM GREY 2.6 M	50157	1 pcs		-	-

x = stock product

Stick-on corner moulding with mesh 9 mm grey

Used for finishing window frames in thin-layer plastering. The moulding is fastened to the window or door frame using the included adhesive tape. A protective plastic sheet can be easily fastened to the frame moulding with adhesive tape. Length 2600 mm. 50 pcs. in a package.



GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841501615	STICK-ON CORNER MOULDING WITH MESH 9 MM GREY 2.6 M	50161	1 pcs		-	-

x = stock product




Fescoterm aluminium profile

Aluminium profile for protecting the bottom edge of the insulation in the Fescoterm thin-layer plastering system. Package size 10 pcs/bundle. Smallest delivery batch one bundle. Length 2.5 m.

GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841500519	FESCOTERM ALUMINIUM PROFILE 50 MM 2.5 M	50051	1 pcs		-	-
6416841500526	FESCOTERM ALUMINIUM PROFILE 70 MM 2.5 M	50052	1 pcs		-	-
6416841500533	FESCOTERM ALUMINIUM PROFILE 100 MM 2.5 M	50053	1 pcs		-	-
6416841500540	FESCOTERM ALUMINIUM PROFILE 140 MM 2.5 M	50054	1 pcs		-	-
6416841500557	FESCOTERM ALUMINIUM PROFILE 160 MM 2.5 M	50055	1 pcs		-	-
6416841501356	FESCOTERM ALUMINIUM PROFILE 180 MM 2.5 M	50135	1 pcs		-	-
6416841501363	FESCOTERM ALUMINIUM PROFILE 200 MM 2.5 M	50136	1 pcs		-	-
6416841501370	FESCOTERM ALUMINIUM PROFILE 200-300 MM 2.5 M	50137	1 pcs		-	-

x = stock product



Drip moulding with mesh

A mesh reinforcement attached to the front edge of the aluminium profile. Drip moulding. Application thickness 10 mm. Length 2.5 m, 15 pcs/package.

GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841501523	DRIP MOULDING WITH MESH 2.5 M	50152	1 pcs		-	-

x = stock product

Connector

Used to connect Fescoterm aluminium profiles to each other. Reduces the risk of cracking in insulation plastering. A bag contains 100 pcs. Supplied in batches of one bag.



GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841501585	CONNECTOR 100 PCS	50158	100 pcs		-	-

x = stock product

Fescoterm plug fastener

The nylon fastener is used to fasten the Fescoterm thin-layer plastering system insulation. The bracket is named according to actual anchor length. Drilling depth for all lengths is at least 35 mm, meaning that, for example, plug bracket 115 mm is suitable for max. 80 mm of insulation. Package size 100 pcs/box or 200 pcs./box.



GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
	FESCOTERM PLUG FASTENER 115 MM 200 PCS	50420	200 pcs		-	-
	FESCOTERM PLUG FASTENER 135 MM 200 PCS	50421	200 pcs		-	-
	FESCOTERM PLUG FASTENER 155 MM 200 PCS	50422	200 pcs		-	-
	FESCOTERM PLUG FASTENER 175 MM 100 PCS	50423	100 pcs		-	-
	FESCOTERM PLUG FASTENER 195 MM 100 PCS	50424	100 pcs		-	-
	FESCOTERM PLUG FASTENER 215 MM 100 PCS	50425	100 pcs		-	-
	FESCOTERM PLUG FASTENER 235 MM 100 PCS	50426	100 pcs		-	-

x = stock product

Installation piece

For straightening the socle profile and adjusting its distance from the mounting surface on uneven surfaces. 100 pcs/box.



GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841501738	INSTALLATION PIECE 100 PCS	50173	100 pcs		-	-

x = stock product



Fastener for the Fescoterm thick-layer plastering system

A fastener for fastening the insulation and mesh to the bedding in the Fescoterm thick-layer plastering insulation system. Fixing always requires a MERK Bracket Kit and a MERK fastening hook named according to the insulation thickness. Usage: 4-10 pcs/m². 100 pcs/box.

GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
	FASTENER FOR THE FESCOTERM THICK-LAYER PLASTERING SYSTEM	50097	100 pcs		-	-
	MERK MOUNTING HOOK 50/61 100 PCS	50400	100 pcs		-	-
	MERK MOUNTING HOOK 70/89 100 PCS	50401	100 pcs		-	-
	MERK MOUNTING HOOK 100/131 100 PCS	50402	100 pcs		-	-
	MERK MOUNTING HOOK 150/202 100 PCS	50403	100 pcs		-	-
	MERK MOUNTING HOOK 160/216 100 PCS	50404	100 pcs		-	-
	MERK MOUNTING HOOK 170/230 100 PCS	50405	100 pcs		-	-
	MERK MOUNTING HOOK 180/244 100 PCS	50406	100 pcs		-	-
	MERK MOUNTING HOOK 200/272 100 PCS	50407	100 pcs		-	-
	MERK MOUNTING HOOK 220/301 100 PCS	50408	100 pcs		-	-
	MERK MOUNTING HOOK 240/329 100 PCS	50409	100 pcs		-	-

x = stock product



Plaster mesh fastener RVK

Used in thick-layer plastering to fasten the mesh to the base so that it stays clear of the base. Material RST A2. 500 pcs/package.

GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841501783	PLASTER MESH FASTENER RVK 5/6	50178	500 pcs		-	-
6416841501790	PLASTER MESH FASTENER RVK 10/6	50179	500 pcs		x	-

x = stock product

Plaster mesh Tammet

Hot-dip galvanised plaster mesh for thick-layer plastering. Opening size 19 x 19 mm/1.0 mm.



GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841501486	PLASTER MESH TAMMET 250 MM 6.25 M2	50148	1 roll	48 rll	-	-
6416841500120	PLASTER MESH TAMMET 1000 MM 25 M2	50012	1 roll	12 rll	x	-
6416841500243	PLASTER MESH TAMMET 1500 MM 37.5 M2	50024	1 roll	12 rll	x	-

x = stock product

14 SANDS



Seaming and blasting sand SPH

Seaming sand for the seaming of yard stones and slabs and sand blasting. Grain size 0.1-0.6 mm. Loose seaming sand delivered in full carloads.

GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841610041	SEAMING AND BLASTING SAND SPH 0.1-0.6 MM 25 KG	61004	25 kg	48 sk	x	x
6416841620019	SEAMING AND BLASTING SAND SPH 0.1-0.6 MM 1000 KG	62001	1000 kg		-	x
	SEAMING AND BLASTING SAND SPH BULK DELIVERY		1 kg		-	-

x = stock product



Seaming sand, black SHM

Hard, impermeable and almost dust-free black seaming sand for the seaming of yard stones and slabs. Grain size 0.1-0.6 mm. Also suitable for sandblasting. Loose seaming sand delivered in full carloads.

GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841610133	SEAMING SAND, BLACK SHM 25 KG	61013	25 kg	48 sk	-	-
	SEAMING SAND, BLACK SHM BULK DELIVERY		1 kg		-	-

x = stock product

Blasting sand PH

Screened, clean natural sand for sand blasting. Grain size 0.5-1.6 mm. Loose blasting sand delivered in full carloads.



GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841610058	BLASTING SAND PH 0.5-1.6 MM 25 KG	61005	25 kg	48 sk	x	x
6416841620026	BLASTING SAND PH 0.5-1.6 MM 1000 KG	62002	1000 kg		-	x
	BLASTING SAND PH BULK DELIVERY		1 kg		-	-

x = stock product

FescoStone Seaming sand

FescoStone is jointing sand for paving. FescoStone is made of natural sand and binders. FescoStone prevents weeds from growing, does not wash away with rain, and reduces the needs for maintaining the gaps between paving stones. Once the product has hardened, it still allows water to permeate through it, and it is suitable for seams of less than 5 mm. Recommended for grey concrete stones. Material usage: stone 60x140x280 mm, app. 3-4 kg/m²/2 mm seam width.



GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841610195	FESCOSTONE SEAMING SAND 25 KG	61019	25 kg	48 sk	x	-

x = stock product



Sanding aggregate HSS

Dried, crushed sanding gravel for de-icing and sanding of yard walkways and driveways. Grain size 3–6 mm. The product is low-dust and dried before bagging, ensuring it remains usable in the bag even during freezing temperatures.

GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841610096	SANDING AGGREGATE HSS 3-6 MM 20 KG	61009	20 kg	48 sk	x	x
6416841610355	SANDING AGGREGATE HSS 3-6 MM 1000 KG	61035	1000 kg		-	-

x = stock product



Playground sand LH

Screened, clean natural sand for yard construction, e.g. for sandboxes or installation use. Grain size 0-2 mm.

GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841610072	PLAYGROUND SAND LH 0-2 MM 25 KG	61007	25 kg	48 sk	x	x
6416841610119	PLAYGROUND SAND LH 0-2 MM 1000 KG	61011	1000 kg		-	-

x = stock product



Playground sand TRH

Playground sand is sieved, round, non-compacting, pure natural sand under playground equipment to minimise impact when tripping or falling. Playground sand grain size is 1–8 mm.

GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841620163	PLAYGROUND SAND TRH 1-8 MM 1000 KG	62016	1000 kg		-	-

x = stock product

Levelling sand TH

Screened, clean natural sand for the installation of yard stones and slabs, and the levelling of the base. Grain size 0-8 mm.



GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841610065	LEVELLING SAND TH 0-8 MM 25 KG	61006	25 kg	48 sk	x	x
6416841610102	LEVELLING SAND TH 0-8 MM 1000 KG	61010	1000 kg		-	-

x = stock product

Stone dust KVT

Crushed stone for driveways and garden paths and as foundation for levelling the ground for garden tiles. Grain size 0-6 mm, grey in color.



GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841610126	STONE DUST KVT 0-6 MM 25 KG	61012	25 kg	48 sk	x	x
6416841610300	STONE DUST KVT 0-6 MM 1000 KG	61030	1000 kg		-	-

x = stock product

Aggregate SEP

Crushed stone for foundations and filling the sides of walls. Grain size 8 - 16 mm.



GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841610409	AGGREGATE SEP 8 - 16 MM 1000 KG	61040	1000 kg		-	-

x = stock product



Black blasting abrasive PRM OKTO

Blasting abrasive is made of crushed, hard mixture. It is a coarse media suitable for sandblasting for both professional and home use. Hard abrasive is also suitable for seaming yard stones. Deep-cutting blasting abrasive is almost dust-free, making it an excellent media for sandblasting.

GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841610164	BLACK BLASTING ABRASIVE PRM OKTO 25 KG	61016	25 kg	48 sk	-	-
6416841620156	BLACK BLASTING ABRASIVE PRM OKTO 1000 KG	62015	1000 kg		-	-
	BLACK BLASTING ABRASIVE PRM OKTO BULK DELIVERY		1 kg		-	-

x = stock product

Filter sand



Filter sand produced by Fescon is widely used in a number of different water filtering processes. Our products are based on carefully selected raw materials and industrial sand processing methods. We provide precision sieved sand fractions for water filtering for all our customers' needs. Grain size: Standard sizes: 0.8–1.2 mm and 1.2–2.0 mm. Other fractions available where required. Delivered in full carloads.

GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
	FILTER SAND SUH 0.8-1.2 MM 25 KG	61583	25 kg	48	-	-
	FILTER SAND 0.8-1.2 MM 1000 KG		1000 kg		-	-
	FILTER SAND 0.8-1.2 MM BULK DELIVERY		1 kg		-	-
	FILTER SAND 1.2-2.0 MM 25 KG		25 kg		-	-
	FILTER SAND 1.2-2.0 MM 1000 KG		1000 kg		-	-
	FILTER SAND 1.2-2.0 MM BULK DELIVERY		1 kg		-	-

x = stock product

Top-dressing sand for golf courses

Top-dressing sand is manufactured from natural sand. The sand is precision sieved to the desired fractions. The dust removal system at our plant considerably reduces the amount of fine particles in the sand, resulting in significantly less dust at the application stage compared to regular sand. The removal of excess dust also improves conditions at the putting green. Delivered in full carloads.



GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
	TOP-DRESSING SAND FOR GOLF COURSES		1 kg		-	-

x = stock product

Fairway sand for golf courses

Fairway sand is manufactured from natural sand. It can be made in two different ways, wet-sieved or precision-sieved. The benefit of precision-sieved product is its more precise fraction distribution. Delivered in full carloads.

GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
	FAIRWAY SAND FOR GOLF COURSES		1 kg		-	-

x = stock product

Bunker sand for golf courses

Bunker sand is manufactured from natural sand according to customer needs. Available in wet-sieved and precision-sieved varieties. Bunker sand meets USGA requirements. Delivered in full carloads.



GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
	BUNKER SAND FOR GOLF COURSES		1 kg		-	-

x = stock product

Top-dressing sand for natural grass



Top-dressing sand is manufactured from natural sand. The sand is precision sieved to the desired fractions. The dust removal system at our plant considerably reduces the amount of fine particles in the sand, resulting in significantly less dust at the application stage compared to regular sand. The removal of excess dust also improves conditions at the putting green. The sand meets FIFA's requirements for football pitches. Delivered in full carloads.

GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
	TOP-DRESSING SAND FOR NATURAL GRASS		1 kg		-	-

x = stock product

Top-dressing sand for artificial turf



Top-dressing sand is manufactured from natural sand. The sand is precision sieved to the desired fractions. The dust removal system at our plant considerably reduces the amount of fine particles in the sand, resulting in significantly less dust at the application stage compared to regular sand. The removal of excess dust also improves conditions at the putting green. The sand meets FIFA's requirements for football pitches. Delivered in full carloads.

GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
	TOP-DRESSING SAND FOR ARTIFICIAL TURF		1 kg		-	-

x = stock product

Long jump sand



Long jump sand is manufactured from natural sand, dried and precision sieved. During the manufacturing process, dust is removed from sand with a dust removal system; thanks to this procedure, the sand is almost dust-free. Complies with WA requirements. Delivered in full carloads.

GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
	LONG JUMP SAND		1 kg		-	-

x = stock product

Manège sand

Manège sand is manufactured from natural sand according to customer needs. Delivered in full carloads.



GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
	MANÈGE SAND		1 kg		-	-

x = stock product

Top-dressing sand for baseball fields (artificial turf)

Top-dressing sand is manufactured from natural sand. The sand is precision sieved to the desired fractions. The dust removal system at our plant considerably reduces the amount of fine particles in the sand, resulting in significantly less dust at the application stage compared to regular sand. The removal of excess dust also improves conditions at the putting green. Delivered in full carloads.



GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
	TOP-DRESSING SAND FOR BASEBALL FIELDS (ARTIFICIAL TURF)		1 kg		-	-

x = stock product

Beach Volley sand

The sand is manufactured from natural sand, dried and precision sieved to the desired fractions. Meets the FIVB requirements of the International Volleyball Federation. Delivered in full carloads.



GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
	BEACH VOLLEY SAND		1 kg		-	-

x = stock product

Playground sand for playgrounds



Playground sand is sieved, round, non-compacting, pure natural sand under playground equipment to minimise impact when tripping or falling. Playground sand grain size is 1-8 mm. Product tested and approved according to the SFS-EN 1177:2008 method. Delivered in full carloads.

GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
	PLAYGROUND SAND TRH BULK DELIVERY		1 kg		-	-

x = stock product

Alkali-resistant bed material GR-GRANULI™



Thanks to its composition and high melting point, alkali-resistant GR-Granuli is suitable for power plants where difficult materials, such as glues, are incinerated, or where a very high bed temperature is required. The melting point of GR-Granuli is over +1400°C. Grain size: Standard grain size 0.5–1.5 mm. Other fractions available where required. Delivered in full carloads.

GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
	ALKALI-RESISTANT BED MATERIAL GR-GRANULI™		1 kg		-	-

x = stock product



Bed sand HP 1000™ for standard boiler conditions

Bed sand manufactured from natural sand for standard boiler conditions. Grain size: Available in several different fractions. Delivered in full carloads.

GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
	BED SAND HP 1000™ FOR STANDARD BOILER CONDITIONS		1 kg		-	-

x = stock product

15 FESCOTOP FLOOR HARDENERS

Fescotop F10 Floor hardener

Fescotop F10 is a quartz aggregate, cement-based dry-shake floor hardener made in Finland for application on fresh concrete surfaces. Wear resistance class A9. Suitable for use in areas of moderate wear and tear, such as lightly-loaded public spaces, industrial halls and warehouses, garages and roofs. Maximum grain size 3 mm, yield 3–8 kg/m². Coloured hardener, minimum production run 3 pallets.



GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841770035	FESCOTOP F10 3 MM CONCRETE GREY (NATURAL) 25 KG	77003	25 kg	48 sk	x	x
6416841771209	FESCOTOP F10 3 MM BRIGHT GREY 25 KG	77120	25 kg	48 sk	x	-
6416841770592	FESCOTOP F10 3 MM DARK GREY 25 KG	77059	25 kg	48 sk	-	-
6416841770608	FESCOTOP F10 3 MMBLACK GREY 25 KG	77060	25 kg	48 sk	-	-

x = stock product

Fescotop F45K Floor hardener

Fescotop F45K is a corundum aggregate, cement-based dry-shake floor hardener made in Finland for application on fresh concrete surfaces. Wear resistance class A6. Suitable for use in heavy duty applications such as public car parks, factory buildings, logistics warehouses and loading bays. Maximum grain size 3 mm, yield 3–8 kg/m². Coloured hardener, minimum production run 3 pallets.



GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841770042	FESCOTOP F45K 3 MM CONCRETE GREY (NATURAL) 25 KG	77004	25 kg	48 sk	x	x
6416841770011	FESCOTOP F45K 3 MM BRIGHT GREY 25 KG	77001	25 kg	48 sk	x	-
6416841770745	FESCOTOP F45K 3 MM DARK GREY 25 KG	77074	25 kg	48 sk	-	-
6416841770677	FESCOTOP F45K 3 MM BLACK GREY 25 KG	77067	25 kg	48 sk	-	-

x = stock product



Fescotop F300 Floor hardener

Fescotop F300 is a corundum aggregate, cement-based dry-shake floor hardener made in Finland for application on fresh concrete surfaces. Wear resistance class A3. Suitable for use in heavy duty applications such as shopping centre car parks, logistics warehouses with continuous traffic, machine shops and in heavy industry. Maximum grain size 3 mm, yield 3–8 kg/m². Coloured hardener, minimum production run 3 pallets.

GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841770806	FESCOTOP F300 CONCRETE GREY (NATURAL) 25KG	77080	25 kg	48 sk	-	-
6416841770813	FESCOTOP F300 BRIGHT GREY 25 KG	77081	25 kg	48 sk	-	-
6416841770820	FESCOTOP F300 DARK GREY 25 KG	77082	25 kg	48 sk	-	-

x = stock product

Fescotop F90K High-performance concrete



Fescotop F90K is a cement-based fibre-reinforced corundum hard concrete. Polymer modification in the product improves adhesion, allowing the product to be used without separate adhesion mortars. Hard concrete can be used on a hardened concrete floor or on fresh concrete casting. Fescotop F90K Hard concrete is intended for applications requiring heavy wear-resistant and corrosive-resistant compact concrete surfaces. Suitable for use in parking garages, driving ramps, industrial production and storage facilities, transport routes, and repair of deteriorated and worn concrete floors. Standard colour: concrete grey. Wear resistance class A3, maximum grain size 3 mm, compressive strength class C 60, material usage approx 2,0 kg/m²/mm. Layer thickness 10 - 20 mm, partial levelling max. 50 mm. The minimum delivery lot for a big bags is 3000 kg.

GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841770264	FESCOTOP F90K HIGH-PERFORMANCE CONCRETE NATURAL/BETHARM 25 KG	77026	25 kg	48 sk	x	-
6416841770363	FESCOTOP F90K HIGH-PERFORMANCE CONCRETE NATURAL/BETHARM 1000 KG	77036	1000 kg		-	-

x = stock product

Curing compound

One-component water-soluble polymer dispersion. Applied on fresh concrete to prevent the concrete from drying too rapidly. A clear liquid after drying. Coverage around 10 m² / l.



GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841770226	CURING COMPOUND 5 L	77022	5 l		-	-
6416841770219	CURING COMPOUND 20 L	77021	20 l	24 prk	x	x

x = stock product

Fescotop FTH Hardener **NEW!**

1-component, highly absorbent treatment agent containing silicate and silicone polymers for concrete floors. Acts as a dust-binding treatment, improves the durability of the concrete surface, and creates a repellent layer against various liquids. Consumption approx. 5–6 m²/l. Suitable for both indoor and outdoor use.



GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841770240	FESCOTOP FTH HARDENER 20 L	77024	20 l	24 prk	x	-

x = stock product

16 TOOLS



FescoBlaster FBL mortar pump

Hand-held mortar pump for applying plaster and concrete to seams and for fixing holes in concrete and stone structures, for example. A very high-quality, professionally designed mortar pump that allows you to easily apply different pastes into difficult places. Easy and simple to use: Pull the trigger to fill the pump's container, and then fill the hole by pushing the paste out of the pump.

GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841100009	FESCOBLASTER FBL 1 MORTAR PUMP, NOZZLE 18 MM RECTANGLE	10000	1 pcs		x	-
6416841100016	FESCOBLASTER FBL 2 MORTAR PUMP, NOZZLE 24 MM ROUND, BENT	10001	1 pcs		x	-
6416841100023	FESCOBLASTER FBL 3 MORTAR PUMP, NOZZLE 18 MM RECTANGLE, BENT	10002	1 pcs		x	-
6416841100030	FESCOBLASTER FBL 4 MORTAR PUMP, NOZZLE 10 MM RECTANGLE	10003	1 pcs		x	-
6416841100054	FESCOBLASTER FBL 6 MORTAR PUMPS, TUBING 13 MM	10005	1 pcs		x	-
6416841100061	FESCOBLASTER FBL 7 MORTAR PUMPS, TUBING 25 MM	10006	1 pcs		x	-
6416841100108	FESCOBLASTER FBL PISTON, SPARE PART	10010	1 pcs		x	-
6416841100115	FESCOBLASTER FBL PUMP COVER, SPARE PART	10011	1 pcs		x	-

x = stock product

17 NANTEN BALCONY COATINGS

Nanten PU Flex UV



2-component, self-levelling, elastic, UV resistant polyurethane coating for indoor and outdoor applications.



GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841152305	NANTEN PU FLEX UV PART A 7.5 KG	15230	7,5 kg	48	x	-
6416841152947	NANTEN PU FLEX UV PART B 2.5 KG	15294	2,5 kg	108	x	-

x = stock product

Nanten PU W2 Paint and varnish



2-component, M1-classified, fully matte polyurethane paint/varnish. Water vapor permeable.



GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841153159	NANTEN PU W2 VARNISH PART A 6 L	15315	6 l	60	-	-
6416841153999	NANTEN PU W2 PAINT AND VARNISH PART B 1 L	15399	1 l	130	-	-

x = stock product

Nanten EP Primer

2-component epoxy primer for dry concrete structures.



GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841157058	NANTEN EP PRIMER PART A 2.55 KG	15705	2,55 kg	72	x	-
6416841157935	NANTEN EP PRIMER PART B 0.95 KG	15793	0,95 kg	240	x	-

x = stock product



Nanten PU Thinner

Xylene-based wash solvent for polyurethane products. Prices according to separate offer.

GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841156006	NANTEN PU THINNER 10 L	15600	10 l	24	x	-

x = stock product



Nanten A Epoxy Thinner

Alcohol-based thinner for epoxy coatings.

GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841156037	NANTEN A EPOXY THINNER 10 L	15603	10 l	24	x	-

x = stock product



Nanten PU Tix

Liquid hardening/thickening agent (Component C) for use in solvent-free Nanten polyurethane coatings, designed to reduce sagging on inclined surfaces.

GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841158079	NANTEN PU Tix 0.2 L	15807	0,2 l		-	-

x = stock product

Nanten Flake 3 mm

PVAC flakes are used with polyurethane-based balcony coatings. Colour grey-white-black.



GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841158413	FLAKE 3 MM COLORMIX GREY 1 KG	15841	1 kg	140	x	-
6416841158376	FLAKE 3 MM 1/50 WHITE 1 KG	15837	1 kg	140	-	-
6416841158390	FLAKE 3 MM 2/52 BLACK 1 KG	15839	1 kg	140	-	-

x = stock product

Nanten Anti-Slip

Polyethylene beads for mixing into varnishes, paints, or coatings. Available in three different grain sizes: 0.100 mm, 0.250 mm and 0.500 mm. Prices according to separate offer.



GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
6416841158307	NANTEN ANTI-SLIP 100 500 G	15830	0,5 kg		-	-
6416841158314	NANTEN ANTI-SLIP 250 500 G	15831	0,5 kg		-	-
6416841158321	NANTEN ANTI-SLIP 500 500 G	15832	0,5 kg		-	-

x = stock product

EPOXY COATINGS



Nanten SL Bio

2-component, self-leveling, wear-resistant epoxy coating. Prices according to separate offer.

GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
	NANTEN SL BIO PART A - NANTEN COLOUR 257	15000	15 l		-	-
	NANTEN SL BIO PART A - NANTEN COLOUR 241	15001	15 l		-	-
	NANTEN SL BIO PART A - OTHER COLOURS 15 L	15002	15 l		-	-
	NANTEN SL BIO PART B 5 L	15099	5 l		-	-
	NANTEN SL BIO PART B 200 L	15098	200 l		-	-

x = stock product



Nanten SL Bio ESD



2-component, self-leveling, low-emission epoxy coating for concrete floors, providing protection against electrostatic discharge. Prices according to separate offer.

GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
	NANTEN SL BIO PART A - NANTEN ESD COLOUR: LIGHT GREY (APPROX. RAL 7035) 15 L	15002	15 l		-	-
	NANTEN SL BIO PART A - NANTEN ESD COLOUR: MID GREY (APPROX. RAL7040)	15000	15 l		-	-
	NANTEN SL BIO PART A - NANTEN ESD COLOUR: DARK GREY (APPROX. RAL 7046)	15001	15 l		-	-
	NANTEN SL BIO ESD PART B 5 L	15088	5 l		-	-

x = stock product

Nanten SL Bio Low VOC



2-component, solvent-free, M1-rated, self-leveling epoxy coating. Extremely low VOC emissions into indoor air. Prices according to separate offer.



GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
	NANTEN SL BIO PART A - NANTEN COLOUR 257	15000	15 l		-	-
	NANTEN SL BIO PART A - NANTEN COLOUR 241	15001	15 l		-	-
	NANTEN SL BIO PART A - OTHER COLOURS 15 L	15002	15 l		-	-
	NANTEN SL/HM BIO LOW VOC PART B 5 L	15096	5 l		-	-

x = stock product

Nanten SL Bio AR

2-component, solvent-free, self-leveling epoxy coating with excellent chemical resistance. Prices according to separate offer.



GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
	NANTEN SL BIO PART A - NANTEN COLOUR 257	15000	15 l		-	-
	NANTEN SL BIO PART A - NANTEN COLOUR 241	15001	15 l		-	-
	NANTEN SL BIO PART A - OTHER COLOURS 15 L	15002	15 l		-	-
	NANTEN SL/HM BIO AR PART B 5 L	15094	5 l		-	-
	NANTEN SL/HM BIO AR PART B 200 L	15093	200 l		-	-

x = stock product



Nanten HM Bio

2-component, solvent-free, rubbable epoxy coating. Good mechanical resistance. Prices according to separate offer.

GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
	NANTEN HM BIO PART A 10 L	15005	10 l		-	-
	NANTEN HM BIO PART A 200 L	15006	200 l		-	-
	NANTEN HM BIO PART B 5 L	15091	5 l		-	-
	NANTEN HM BIO PART B 200 L	15090	200 l		-	-

x = stock product



Nanten HM Bio Low VOC



2-component, M1-classified, solvent-free, trowel-applied epoxy coating. Very low VOC emissions into indoor air. Prices according to separate offer.

GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
	NANTEN HM BIO PART A 10 L	15005	10 l		-	-
	NANTEN HM BIO PART A 200 L	15006	200 l		-	-
	NANTEN SL/HM BIO LOW VOC PART B 5 L	15096	5 l		-	-

x = stock product

Nanten HM Bio AR

2-component, solvent-free, trowel-applied epoxy coating. Good chemical resistance.
Prices according to separate offer.



GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
	NANTEN HM BIO PART A 10 L	15005	10 l		-	-
	NANTEN HM BIO PART A 200 L	15006	200 l		-	-
	NANTEN SL/HM BIO AR PART B 5 L	15094	5 l		-	-
	NANTEN SL/HM BIO AR PART B 200 L	15093	200 l		-	-

x = stock product

Nanten HM Bio ESD

2-component, solvent-free, trowel-applied epoxy coating for electrostatic discharge (ESD) protected areas. Prices according to separate offer.



GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
	NANTEN HM BIO PART A 10 L	15005	10 l		-	-
	NANTEN HM BIO PART A 200 L	15006	200 l		-	-
	NANTEN HM BIO PART B 5 L	15091	5 l		-	-
	NANTEN HM BIO PART B 200 L	15090	200 l		-	-

x = stock product



Nanten EP W2 Paint and varnish



2-component, M1-classified epoxy paint for areas with lighter loads. Water vapor permeable. Prices according to separate offer.

GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
	NANTEN EP W2 PAINT PART A - COLOR NANTEN 257 3 L	15100	3 l		-	-
	NANTEN EP W2 PAINT PART A - OTHER COLOR 3 L	15102	3 l		-	-
	NANTEN EP W2 VARNISH PART A 3 L	15108	3 l		-	-
	NANTEN EP W2 PAINT AND VARNISH PART B 6 L	15199	6 l		-	-

x = stock product



Nanten HM W



2-component, M1-classified, water vapor permeable, trowel-applied epoxy coating. Prices according to separate offer.

GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
	NANTEN HM W PART A 6 L	15110	6 l		-	-
	NANTEN HM W PART A 200 L	15111	200 l		-	-
	NANTEN HM SL W/HM W PART B 12 L	15197	12 l		-	-
	NANTEN SL W/HM W PART A 200 L	15196	200 l		-	-

x = stock product

Nanten SL W



2-component, M1-classified, self-levelling, water vapor permeable epoxy coating. Price according to separate offer.



GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
	NANTEN SL W PART A - NANTEN COLOR 257 3 L	15120	3 l		-	-
	NANTEN SL W PART A - OTHER COLOURS 3 L	15121	3 l		-	-
	NANTEN HM SL W/HM W PART B 6 L	15195	6 l		-	-

x = stock product

Nanten HM Bio True Colors

Tintable natural stone-filled trowel-applied coating system. Prices according to separate offer.



GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
	NANTEN HM BIO TRUE COLOURS PART A 10 L	15009	10 l		-	-
	NANTEN HM BIO PART B 5 L	15091	5 l		-	-
	NANTEN HM BIO PART B 200 L	15090	200 l		-	-

x = stock product

POLYURETHANE COATINGS, PAINTS AND VARNISHES



Nanten PU Bio



2-component, M1-classified, self-levelling polyurethane coating. Prices according to separate offer.

GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
	NANTEN PU BIO PART A - NANTEN COLOUR 257 15 L	15200	15 l		-	-
	NANTEN PU BIO PART A - NANTEN COLOUR 241 15 L	15201	15 l		-	-
	NANTEN PU BIO PART A - OTHER COLOURS 15 L	15202	15 l		-	-
	NANTEN PU BIO PART B 5 L	15299	5 l		-	-
	NANTEN PU BIO PART B 205 L	15298	205 l		-	-

x = stock product



Nanten PU Flex Bio



2-component, M1-classified, self-smoothing, elastic polyurethane coating. Price according to separate offer.

GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
	NANTEN PU FLEX BIO PART A - COLOUR NANTEN 257 15 L	15210	15 l		-	-
	NANTEN PU FLEX BIO PART A - COLOUR NANTEN 241 15 L	15211	15 l		-	-
	NANTEN PU FLEX BIO PART A - OTHER COLOURS 15 L	15212	15 l		-	-
	NANTEN PU FLEX BIO PART B 5 L	15297	5 l		-	-
	NANTEN PU FLEX BIO PART B 184 L	15296	184 l		-	-

x = stock product

Nanten PU Flex Silent

2-component, sound-absorbing elastic polyurethane coating. Price according to separate offer.



GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
	NANTEN PU FLEX SILENT PART A 13.8 L	15220	13,8 l		-	-
	NANTEN PU FLEX SILENT PART B 2.5 L	15295	2,5 l		-	-

x = stock product

Nanten PU W1 Paint and varnish

1-component polyurethane paint with high UV protection. Water vapor permeable. Price according to separate offer.



GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
	NANTEN PU W1 PAINT - COLOUR NANTEN 257 9 L	15300	9 l		-	x
	NANTEN PU W1 PAINT - OTHER COLOUR 9 L	15302	9 l		-	-
	NANTEN PU W1 VARNISH 9 L	15303	9 l		-	-

x = stock product



Nanten PU W2 Paint and varnish



2-component, M1-classified, fully matte polyurethane paint/varnish. Water vapor permeable. Price according to separate offer.

GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
	NANTEN PU W2 PAINT PART A - COLOUR NANTEN 257 6 L	15310	6 l		-	-
	NANTEN PU W2 PAINT PART A - OTHER COLOURS 6 L	15312	6 l		-	-
	NANTEN PU W2 VARNISH PART A 6 L	15315	6 l		-	-
	NANTEN PU W2 PAINT AND VARNISH PART B 1 L	15399	1 l		-	-

x = stock product

ACRYLIC COATINGS AND PRIMERS

Nanten Acrylic hardener

Catalyst / hardener for acrylic resins. Prices according to separate offer.

GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
	NANTEN ACRYLIC HARDENER 1 KG	15499	1 kg		-	-
	NANTEN ACRYLIC HARDENER 25 KG	15498	25 kg		-	-

x = stock product

Nanten Matacryn

2-component, polyurethane-modified, elastic, fast-curing, acrylic-based (MMA) waterproof membrane for concrete structures. Prices according to separate offer.



GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
	NANTEN MATACRYL 25 KG	15423	25 kg		-	-

x = stock product

Nanten Acrylic 319 M1



M1-classified acrylic topcoat. Prices according to separate offer.



GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
	NANTEN ACRYLIC 319-M1 20 KG	15400	20 kg		-	-
	NANTEN ACRYLIC 319-M1 180 KG	15401	180 kg		-	-

x = stock product



Nanten Acrylic Sealer 319

Acrylic topcoat for areas exposed to water and temperature fluctuations. Prices according to separate offer.

GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
	NANTEN ACRYLIC SEALER 319 20 KG	15405	20 kg		-	-
	NANTEN ACRYLIC SEALER 319 COLOUR - TINTING 10 KG	15404	10 kg		-	-
	NANTEN ACRYLIC SEALER 319 180 KG	15403	180 kg		-	-

x = stock product



Nanten Acrylic Sealer 305

Acrylic topcoat for areas exposed to chemicals and fats. Prices according to separate offer.

GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
	NANTEN ACRYLIC SEALER 305 180 KG	15408	180 kg		-	x

x = stock product



Nanten Acrylic Sealer 304

Acrylic topcoat for areas exposed to chemicals and fats. Prices according to separate offer.

GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
	NANTEN ACRYLIC SEALER 304 20 KG	15409	20 kg		-	-
	NANTEN ACRYLIC SEALER 304 180 KG	15410	180 kg		-	-

x = stock product

Nanten Acrylic 216

Elastic, crack-bridging, multipurpose acrylic binder. Prices according to separate offer.



GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
	NANTEN ACRYLIC 216 20 KG	15411	20 kg		-	-
	NANTEN ACRYLIC 216 180 KG	15412	180 kg		-	-

x = stock product

Nanten Acrylic 205

Acrylic binder for acrylic coating systems. Prices according to separate offer.



GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
	NANTEN ACRYLIC 205 180 KG	15426	180 kg		-	-

x = stock product

Nanten Acrylic 20N M1



M1-classified acrylic binder for acrylic coating systems. Prices according to separate offer.



GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
	NANTEN ACRYLIC 20N-M1 20 KG	15413	20 kg		-	-
	NANTEN ACRYLIC 20N-M1 180 KG	15414	180 kg		-	-

x = stock product



Nanten Acrylic 20N

Acrylic binder for acrylic coating systems. Prices according to separate offer.

GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
	NANTEN ACRYLIC 20N 20 KG	15415	20 kg		-	-
	NANTEN ACRYLIC 20N 180 KG	15416	180 kg		-	-

x = stock product



Nanten Acrylic 101-M1



M1-classified, medium-viscosity, fast-curing universal primer with excellent adhesion for acrylic coating systems. Low-emission and M1 emission-classified. Prices according to separate offer.

GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
	NANTEN ACRYLIC 101-M1 20 KG	15419	20 kg		-	-
	NANTEN ACRYLIC 101-M1 180 KG	15420	180 kg		-	-

x = stock product



Nanten Acrylic Primer 101

Primer for acrylic coating systems for priming dry concrete substrates. Prices according to separate offer.

GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
	NANTEN ACRYLIC PRIMER 101 20 KG	15428	20 kg		-	-
	NANTEN ACRYLIC PRIMER 101 180 KG	15422	180 kg		-	-

x = stock product

Nanten Acrylic Primer 107

Primer for acrylic coating systems for priming damp concrete substrates. Prices according to separate offer.



GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
	NANTEN ACRYLIC PRIMER 107 180 KG	15418	180 kg		-	-
	NANTEN ACRYLIC PRIMER 107 20 KG	15427	20 kg		-	-

x = stock product

Nanten Acrylic cleaner

Methyl methacrylate (MMA)-based solvent for cleaning contaminated tools and surfaces in acrylic coating applications. Not suitable for thinning coatings. Prices according to separate offer.



GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
	NANTEN ACRYLIC CLEANER 10 L	15430	10 l		-	-
	NANTEN ACRYLIC CLEANER 202 L	15431	202 l		-	-

x = stock product

HYBRID COATINGS



Nanten ColorPUR Topcoat

3-component hybrid polyurethane–cement-based topcoat. The product is certified with the Eurofins Indoor Air Comfort Gold certificate. Prices according to separate offer.

GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
	NANTEN ColorPUR Topcoat SERIES 4.45 kg	15500	4,45 kg		-	-
	NANTEN ColorPUR Part A 1.2 kg	15510	1,2 kg		-	-
	NANTEN ColorPUR Part B 1.25 kg	15520	1,25 kg		-	-
	NANTEN ColorPUR Topcoat Part C 2 kg	15530	2 kg		-	-

x = stock product



Nanten ColorPUR SL 4 mm

3-component, self-levelling polyurethane–cement coating. The product is certified with the Eurofins Indoor Air Comfort Gold certificate. Prices according to separate offer.

GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
	NANTEN ColorPUR SL 4 mm SERIES 20.1 kg	15501	20,1 kg		-	-
	NANTEN ColorPUR Part A 2.5 kg	15511	2,5 kg		-	-
	NANTEN ColorPUR Part B 2.6 kg	15521	2,6 kg		-	-
	NANTEN ColorPUR SL 4 mm Part C 15 kg	15531	15 kg		-	-

x = stock product

Nanten ColorPUR 6-9 mm

3-component hybrid polyurethane-cement coating. The product is certified with the Eurofins Indoor Air Comfort Gold certificate. Prices according to separate offer.



GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
	NANTEN ColorPUR 6-9 mm SERIES 31.5 kg	15506	31,5 kg		-	-
	NANTEN ColorPUR Part A 2.5 kg	15511	2,5 kg		-	-
	NANTEN ColorPUR Part B 2.6 kg	15521	2,6 kg		-	-
	NANTEN ColorPUR 6-9 mm Part C 26.4 kg	15536	26,4 kg		-	-

x = stock product

Nanten ColorPUR Primer

3-component hybrid polyurethane-cement primer. Price according to separate offer.



GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
	NANTEN ColorPUR Primer SERIES 6.5 kg	15504	6,5 kg		-	-
	NANTEN ColorPUR Part A 2.5 kg	15511	2,5 kg		-	-
	NANTEN ColorPUR Part B 2.6 kg	15521	2,6 kg		-	-
	NANTEN ColorPUR Primer Part C 1.4 kg	15534	1,4 kg		-	-

x = stock product



Nanten ColorPUR Cove mix

3-component polyurethane cement in baseboards for ColorPUR coatings. The product is certified with the Eurofins Indoor Air Comfort Gold certificate. Price according to separate offer.

GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
	NANTEN ColorPUR Baseboard/Cove Mix SERIES 24.5 kg	15505	24,5 kg		-	-
	NANTEN ColorPUR Part A 1.2 kg	15510	1,2 kg		-	-
	NANTEN ColorPUR Part B 1.25 kg	15520	1,25 kg		-	-
	NANTEN ColorPUR Baseboard/Cove Mix Part C 22.05 kg	15535	22,05 kg		-	-

x = stock product

THINNERS

Nanten PU Thinner

Xylene-based washing solvent for polyurethane products. Price according to separate offer.



GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
	NANTEN PU THINNER 200 L	15601	200 l		-	-
	NANTEN PU THINNER 10 L	15600	10 l		-	-

x = stock product

Nanten A Epoxy Thinner

Alcohol-based thinner for epoxy coatings. Prices according to separate offer.



GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
	NANTEN A EPOXY THINNER 200 L	15604	200 l		-	-
	NANTEN A EPOXY THINNER 10 L	15603	10 l		-	-

x = stock product



Nanten Epoxy thinner

Xylene-based cleaning solvent for epoxy products. Prices according to separate offer.

					HYVINKÄÄ	OULU
GTIN code	Product name	Product number	Package size	Platform size	In Stock	In Stock
	NANTEN EPOXY THINNER 10 L	15606	10 l		-	-
	NANTEN EPOXY THINNER 200 L	15607	200 l		-	-

x = stock product

PRIMERS

Nanten Epoxy Barrier



2-component encapsulation agent for harmful compounds and residues in structures (VOC, PAH, PCB), as well as asbestos, casein, microbes, radon and other gases. Prices according to separate offer.



GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
	NANTEN EPOXY BARRIER PART A 6 KG	15700	6 kg		-	-
	NANTEN EPOXY BARRIER PART B 3 KG	15799	3 kg		-	-

x = stock product

Nanten HM Bio

2-component, solvent-free, rubbable epoxy coating. Good mechanical resistance. Prices according to separate offer.



GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
	NANTEN HM BIO PART A 10 L	15005	10 l		-	-
	NANTEN HM BIO PART A 200 L	15006	200 l		-	-
	NANTEN HM BIO PART B 5 L	15091	5 l		-	-
	NANTEN HM BIO PART B 200 L	15090	200 l		-	-

x = stock product



Nanten HM Bio Low VOC



2-component, M1-classified, solvent-free, trowel-applied epoxy coating. Very low VOC emissions into indoor air. Prices according to separate offer.

GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
	NANTEN HM BIO PART A 10 L	15005	10 l		-	-
	NANTEN HM BIO PART A 200 L	15006	200 l		-	-
	NANTEN SL/HM BIO LOW VOC PART B 5 L	15096	5 l		-	-

x = stock product



Nanten F Primer

2-component fast epoxy primer. Prices according to separate offer.

GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
	NANTEN HM BIO PART A 10 L	15005	10 l		-	-
	NANTEN F PRIMER PART B 2.5 L	15798	2,5 l		-	-

x = stock product

Nanten M Primer

2-component epoxy primer for damp and freshly cast concrete structures. Prices according to separate offer.



GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
	NANTEN M PRIMER PART A 10 L	15701	10 l		-	-
	NANTEN M PRIMER PART A 200 L	15702	200 l		-	-
	NANTEN M PRIMER PART B 5 L	15797	5 l		-	-
	NANTEN M PRIMER PART B 200 L	15796	200 l		-	-

x = stock product

Nanten EP Primer

2-component epoxy primer for priming dry concrete structures. Prices according to separate offer.



GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
	NANTEN EP PRIMER PART A 12.5 L	15706	12,5 l		-	-
	NANTEN EP PRIMER PART A 200 L	15707	200 l		-	-
	NANTEN EP PRIMER PART B 200 L	15791	200 l		-	-
	NANTEN EP PRIMER PART B 5 L	15792	5 l		-	-
	NANTEN EP PRIMER PART A 2.55 KG	15705	2,55 kg		-	-
	NANTEN EP PRIMER PART B 0.95 KG	15793	0,95 kg		-	-

x = stock product



Nanten ESD Primer

2-component, low-solvent, electrically conductive epoxy primer for Nanten ESD coating systems. Prices according to separate offer.

GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
	NANTEN ESD PRIMER PART A 15.5 L	15704	15,5 l		-	-
	NANTEN ESD PRIMER PART B 3.1 L	15794	3,1 l		-	-

x = stock product

OTHER PRODUCTS

Nanten IHP Injection Resin

2-component, colourless, low-viscosity epoxy resin for repairing cracks and damage in concrete structures. Prices according to separate offer.



GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
	NANTEN IHP INJECTION RESIN PART A 0.66 L	15800	0,66 l		-	-
	NANTEN IHP INJECTION RESIN PART B 0.33 L	15899	0,33 l		-	-

x = stock product

Nanten PU Tix

Liquid hardening/thickening agent (Component C) for use in solvent-free Nanten polyurethane coatings, designed to reduce sagging on inclined surfaces. Prices according to separate offer.



GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
	NANTEN PU Tix 1 L	15803	1 l		-	-

x = stock product

Nanten EP Accelerator

Liquid accelerator (Component C) for use in solvent-free Nanten epoxy coatings, designed to reduce the curing time of epoxy-based products. Prices according to separate offer.



GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
	NANTEN EP ACCELERATOR 1 L	15801	1 l		-	-

x = stock product



Nanten Anti-Slip

Polyethylene beads for mixing into varnishes, paints, or coatings. Available in three different grain sizes: 0.100 mm, 0.250 mm and 0.500 mm. Prices according to separate offer.

GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
	NANTEN ANTI-SLIP 100 500 G	15830	0,5 kg		-	-
	NANTEN ANTI-SLIP 250 500 G	15831	0,5 kg		-	-
	NANTEN ANTI-SLIP 500 500 G	15832	0,5 kg		-	-

x = stock product

Sylothix 51

Fine polyethylene fibre for thixotropic thickening of coatings. Used for stiffening epoxy and acrylic coatings, e.g. in upturns. Normally added 1–3 wt-% into component A of the coating and mixed thoroughly for 5–10 minutes before adding the hardener. Prices according to separate offer.

GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
	SYLOTHIX 51 3 L (0.3 KG)	15805	3 l	60	-	-
	SYLOTHIX 51 10 KG	15806	10 kg	12	-	-

x = stock product

Flakes

Thin, pigmented decorative flakes. Ready-made Colormixes as well as black and white flakes are available in sizes 1 mm and 3 mm, other colours in 1 mm (average diameter).

Used to enhance the surface appearance of self-levelling epoxy and polyurethane coatings. Prices according to separate offer.

GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
	FLAKES 1 MM 5/42 GREY 1 KG	15814	1 kg	140	-	-
	FLAKES 1 MM 5/42 GREY 20 KG	15815	20 kg	24	-	-
	FLAKES 1 MM 1/50 WHITE 1 KG	15816	1 kg	140	-	-
	FLAKES 1 MM 1/50 WHITE 20 KG	15817	20 kg	24	-	-
	FLAKES 1 MM 2/52 BLACK 1 KG	15818	1 kg	140	-	-
	FLAKES 1 MM 2/52 BLACK 20 KG	15819	20 kg	24	-	-
	FLAKES 1 MM OTHER COLORS 1 KG	15820	1 kg	140	-	-
	FLAKES 1 MM OTHER COLORS 20 KG	15821	20 kg	24	-	-
	FLAKES 1 MM COLORMIX GREY 1 KG	15822	1 kg	140	-	-
	FLAKES 1 MM COLORMIX GREY 20 KG	15823	20 kg	24	-	-
	FLAKES 1 MM COLORMIX WHITE 1 KG	15824	1 kg	140	-	-
	FLAKES 1 MM COLORMIX WHITE 20 KG	15825	20 kg	24	-	-
	FLAKES 1 MM COLORMIX BEIGE 1 KG	15826	1 kg	140	-	-
	FLAKES 1 MM COLORMIX BEIGE 20 KG	15827	20 kg	24	-	-
	FLAKES 3 MM 5/42 GREY 1 KG	15835	1 kg	140	-	-
	FLAKES 3 MM 5/42 GREY 20 KG	15836	20 kg	24	-	-
	FLAKE 3 MM 1/50 WHITE 1 KG	15837	1 kg	140	-	-
	FLAKES 3 MM 1/50 WHITE 20 KG	15838	20 kg	24	-	-
	FLAKE 3 MM 2/52 BLACK 1 KG	15839	1 kg	140	-	-
	FLAKES 3 MM 2/52 BLACK 20 KG	15840	20 kg	24	-	-
	FLAKE 3 MM COLORMIX GREY 1 KG	15841	1 kg	140	-	-
	FLAKES 3 MM COLORMIX GREY 20 KG	15842	20 kg	24	-	-
	FLAKES 3 MM COLORMIX WHITE 1 KG	15845	1 kg	140	-	-
	FLAKES 3 MM COLORMIX WHITE 20 KG	15846	20 kg	24	-	-
	FLAKES 3 MM COLORMIX BEIGE 1 KG	15847	1 kg	140	-	-
	FLAKES 3 MM COLORMIX BEIGE 20 KG	15848	20 kg	24	-	-

x = stock product

FILL SANDS

Fill sand 0.2 mm

Used as fill sand in self-levelling epoxy and polyurethane coatings. Grain size approx. 0.2 mm. Prices according to separate offer.

GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
	FILL SAND 0.2 MM 22.5 KG	15850	22,5 kg	56	-	-

x = stock product

Fill sand 0.1-0.6 mm

Used as fill sand in self-levelling epoxy and polyurethane coatings. Grain size approx. 0.1-0.6 mm. Prices according to separate offer.

GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
	FILL SAND 0.1-0.6 MM 25 KG	15851	25 kg	48	-	-

x = stock product



Filter sand SUH

Used as fill sand in trowelable acrylic and epoxy coatings. Grain size 0.8 – 1.2 mm. Prices according to separate offer.

GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
	FILTER SAND SUH 0.8-1.2 MM 25 KG	61583	25 kg	48	-	-

x = stock product

Epoxifiller-fill sand

Used as fill sand in the self-levelling Nanten SL W coating. Grain size 0.03–0.36 mm.

Prices according to separate offer.

GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
	EPOXIFILLER-FILL SAND 20 KG	15852	20 kg	40	-	-

x = stock product

ESD-fill sand

Used as fill sand in trowelable Nanten HM Bio ESD coating. Grain size 0.6–1.3 mm. Prices

according to separate offer.

GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
	ESD-FILL SAND 25 KG	15853	25 kg	40	-	-

x = stock product

True Colors -fill sand

Used as fill sand in the trowelable Nanten HM Bio True Colors coating method. Grain size

0.8–1.2 mm. Prices according to separate offer.

GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
	TRUE COLORS -FILL SAND 25 KG	15854	25 kg	40	-	-

x = stock product

Coloured sand

Used as fill sand in trowelable acrylic and epoxy coatings. Grain size 0.6–1.2 mm (white and grey also 0.3–0.8 mm as well as mix 180, 380 and 480). Prices according to separate offer.

GTIN code	Product name	Product number	Package size	Platform size	HYVINKÄÄ	OULU
					In Stock	In Stock
	COLOURED SAND VH 1 WHITE 0.6-1.2 MM 25 KG	15861	25 kg	40	-	-
	COLOURED SAND VH 1 WHITE 0.3-0.8 MM 25 KG	15862	25 kg	40	-	-
	COLOURED SAND VH 5 YELLOW 0.6-1.2 MM 25 KG	15866	25 kg	40	-	-
	COLOURED SAND VH 3 GREY 0.6-1.2 MM 25 KG	15863	25 kg	40	-	-
	COLOURED SAND VH 3 GREY 0.3-0.8 MM 25 KG	15864	25 kg	40	-	-
	COLOURED SAND VH 4 LIGHT BROWN 0.6-1.2 MM 25 KG	15865	25 kg	40	-	-
	COLOURED SAND VH 10 BLUE 0.6-1.2 MM 25 KG	15867	25 kg	40	-	-
	COLOURED SAND VH 11 GREEN 0.6-1.2 MM 25 KG	15868	25 kg	40	-	-
	COLOURED SAND VH 20 BLACK 0.6-1.2 MM 25 KG	15869	25 kg	40	-	-
	COLOURED SAND VH 40 LEMON YELLOW 0.6-1.2 MM 25 KG	15870	25 kg	40	-	-
	COLOURED SAND VH 50 BRICK RED 0.6-1.2 MM 25 KG	15871	25 kg	40	-	-
	COLOURED SAND VH MIX 370 0.6-1.2 MM 25 KG	15876	25 kg	40	-	-
	COLOURED SAND VH MIX 470 0.6-1.2 MM 25 KG	15877	25 kg	40	-	-
	COLOURED SAND VH MIX 170 0.6-1.2 MM 25 KG	15878	25 kg	40	-	-
	COLOURED SAND VH MIX 380 0.3-0.8 MM 25 KG	15879	25 kg	40	-	-
	COLOURED SAND VH MIX 480 0.3-0.8 MM 25 KG	15880	25 kg	40	-	-
	COLOURED SAND VH MIX 180 0.3-0.8 MM 25 KG	15881	25 kg	40	-	-
	COLOURED SAND VH DANISH MIX 0.6-1.2 MM 25 KG	15882	25 kg	40	-	-

x = stock product

Index

Adhesion promoter	44	Facade coating JSP 1.5	62
Adhesive and surface render KPL	74	Fairway sand for golf courses	91
Adhesive mortar FLL	65	Fast Mortar XtremeRapid XR	18
Adhesive plaster TL	60	Fastener for the Fescoterm thick-layer plastering system	84
Aggregate SEP	89	FescoBlaster FBL mortar pump	98
Alkali-resistant bed material GR-GRANULI™	94	Fescofine	38
Angle guide profile 5 mm	77	Fescofine	58
Antique plaster AL	64	Fescorapid	38
Beach Volley sand	93	Fescorapid	58
Bed sand HP1000™ for standard boiler conditions	94	Fescosan-Coating	69
Bedding plaster LF	32	Fescosan-Facade paint	70
Bedding plaster LF RD	32	Fescoseal A+B	44
Bedding plaster VF	34	FescoStone Seaming sand	87
Black blasting abrasive PRM OKTO	90	Fescoterm aluminium profile	82
Blasting sand PH	87	Fescoterm plug fastener	83
Block mortar M100/500	28	Fescotop F10 Floor hardener	95
Block mortar M100/500 Winter	28	Fescotop F300 Floor hardener	96
Bolting plaster SR	58	Fescotop F45K Floor hardener	95
Bordering moulding with mesh 6 mm	78	Fescotop F90K High-performance concrete	96
Bordering strip 8x150 mm	42	Fescotop FTH Hardener	97
Bottom moulding for board plastering with mesh	75	Fibre plaster FL	65
Brick bedding plaster TTF	33	Fibreglass mesh	79
Bunker sand for golf courses	91	Fill sand 0.1-0.6 mm	128
Cement concrete S 100	13	Fill sand 0.2 mm	128
Cement plaster S 30 C30/37	11	Filling plaster TLR	35
Clay stove mortar SUL	19	Filter sand	90
Coarse floor levelling compound LM 5000	37	Filter sand SUH	128
Coloured sand	130	Finishing plaster LRF	33
Compact mortar Heavy M100/600 Winter	26	Finishing plaster LRF RD	33
Compact mortar Heavy M100/600	25	Finishing plaster VHF	34
Compact mortar M100/600	23	Fireproof casting concrete TKV	19
Compact mortar M100/600 Winter	24	Fireproof masonry mortar TKM	19
Connector	83	Fireproof repairing compound TKK	20
Corner bead 100 x 150 mm	79	Flakes	127
Corner bead roll 90 x 110 mm	79	Floor concrete LB 7	38
Corro concrete K 45	12	Floor levelling plaster LT 4000	37
Corro concrete SR C35/45	13	Flow CS	39
Curing compound	97	Flow FS	40
Deeply penetrating primer	69	Flow GS 3.0 mm Gypsum floor mass	40
Drain flange 300x300 mm fibre	46	Flow Primer	41
Drain flange KL-B	46	FlowPlan	39
Drip moulding with mesh	82	Grouting concrete JB 1000/3	14
Edge strip 30x30x2000 mm	42	Grouting concrete JB 600/3	14
Elevation mark	41	Grouting concrete JBSR 1000/3	15
ELK Clinker element grout	31	Grouting concrete TJB Winter	15
ELT Brick element grout	30	Gypsum plaster mix GL	35
Epoxifiller-fill sand	129	Indoor lime-cement plaster SR 7	35
ESD-fill sand	129	Installation piece	83
Expansion joint with fibreglass mesh	76	Joint filler SF	32
Expansion joint with fibreglass mesh	76	Korrogard R 0.6 mm	60
Facade coating JSP 0.5	62	Korrogard R 1.2 mm	61

Korroshot D KSD 5.0 mm	61	Nanten Flake 3 mm	101
Levelling compound for wet areas WTT	34	Nanten HM Bio	104
Levelling plaster TSL	65	Nanten HM Bio	121
Levelling sand TH	89	Nanten HM Bio AR	105
Lightweight lime-cement plaster KEV KS 35/65	54	Nanten HM Bio Low VOC	104
Lime paint KM	66	Nanten HM Bio Low VOC	122
Lime plaster K100/1200	55	Nanten HM Bio True Colors	107
Lime-cement coating JL	63	Nanten HM W	106
Lime-cement coating KSP	63	Nanten HM Bio ESD	105
Lime-cement plaster HD KS 20/80 fibre	54	Nanten IHP Injection Resin	125
Lime-cement plaster HD KS 35/65 fibre	54	Nanten M Primer	123
Lime-cement plaster KS 10/90	52	Nanten Maticryl	111
Lime-cement plaster KS 35/65	52	Nanten PU Bio	108
Lime-cement plaster KS 50/50	53	Nanten PU Flex Bio	108
Lime-cement plaster KS 65/35	53	Nanten PU Flex Silent	109
Long jump sand	92	Nanten PU Flex UV	99
Manège sand	93	Nanten PU Thinner	100
Masonry mortar M100/600	21	Nanten PU Thinner	119
Masonry mortar M100/600 Winter	22	Nanten PU Tix	100
Mortar for tongue and groove blocks PHL Winter	29	Nanten PU Tix	125
Mortar for tongue-and-groove blocks PHL	29	Nanten PU W1 Paint and varnish	109
Nanten A Epoxy Thinner	100	Nanten PU W2 Paint and varnish	99
Nanten A Epoxy Thinner	119	Nanten PU W2 Paint and varnish	110
Nanten Acrylic 101-M1	114	Nanten SL Bio	102
Nanten Acrylic 205	113	Nanten SL Bio AR	103
Nanten Acrylic 20N	114	Nanten SL Bio ESD	102
Nanten Acrylic 20N M1	113	Nanten SL Bio Low VOC	103
Nanten Acrylic 216	113	Nanten SL W	107
Nanten Acrylic 319 M1	111	Overlevelling plaster YTL	57
Nanten Acrylic cleaner	115	Overlevelling plaster Coarse YTLK	57
Nanten Acrylic hardener	111	Permaabase plastering board	74
Nanten Acrylic Primer 101	114	Piirto Silicone resin coating	68
Nanten Acrylic Primer 107	115	Plaatimissegu RSL Rapid	49
Nanten Acrylic Sealer 304	112	Plaster mesh fastener RVK	84
Nanten Acrylic Sealer 305	112	Plaster mesh Tammet	85
Nanten Acrylic Sealer 319	112	Playground sand for playgrounds	94
Nanten Anti-Slip	101	Playground sand LH	88
Nanten Anti-Slip	126	Playground sand TRH	88
Nanten ColorPUR 6-9 mm	117	Primer KP	45
Nanten ColorPUR Cove mix	118	Primer PLUS	41
Nanten ColorPUR Primer	117	Protective paint	67
Nanten ColorPUR SL 4 mm	116	Quick Drill 45	61
Nanten ColorPUR Topcoat	116	Rapid concrete PB	17
Nanten EP Accelerator	125	Repair concrete RKB	56
Nanten EP Primer	99	Repairing plaster KL 25+	56
Nanten EP Primer	123	Repairing plaster KL 40+	57
Nanten EP W2 Paint and varnish	106	Rock paint FRP Cave paint	59
Nanten Epoxy Barrier	121	Sanding aggregate HSS	88
Nanten Epoxy thinner	120	Sanitary silicone	51
Nanten ESD Primer	124	Seaming and blasting sand SPH	86
Nanten F Primer	122	Seaming sand, black SHM	86

Separation fabric 1.5x50 m	42	Vertical-joint concrete PSB K50	17
Side moulding for board plastering without mesh	75	Vertical-joint concrete winter TPSB K30	16
Side moulding for board plastering without mesh 2,5 m	74	Vertical-joint concrete winter TPSB K40	16
Silicate board SKL	73	Vertical-joint concrete winter TPSB K45	17
Silicate facade paint	71	Wet plaster	55
Silicate interior paint	72	Winter concrete TB S 30 C30/37	12
Silicate jamb board 500 x 250 x 15 mm	73	Winterbolting plaster SR	59
Silicate Primer	71	Winter-time masonry mortar TML	27
Silicone resin coating MC	68		
Silicone resin paint	70		
Silicone resin primer MC	67		
SILKO Corro SKC C35/45	59		
SILKO Rapid Corro SPC C35/45	60		
Socle and adjusting plaster SOL	64		
Socle moulding 10 mm for thin-layer plastering	77		
Socle moulding 8 mm for thin-layer plastering with mesh	78		
Socle moulding with mesh 6 mm	77		
Stick-on corner moulding 10 mm	80		
Stick-on corner moulding 6 mm	80		
Stick-on corner moulding 9 mm grey	81		
Stick-on corner moulding with mesh	80		
Stick-on corner moulding with mesh 9 mm grey	81		
Stone colour KS	66		
Stone colour S	66		
Stone dust KVT	89		
Stone joint grout KSL black grey	18		
Sylothix 51	126		
Thin plaster S 06	11		
Thin seam mortar KVL Stone adhesive	28		
Thin-layer compo plaster KRL	64		
Tile adhesive plaster ILL	49		
Tile adhesive plaster SS2	49		
Tile adhesive plaster VSL	48		
Tile seaming plaster SML	50		
Top moulding for board plastering	75		
Top-dressing sand for artificial turf	92		
Top-dressing sand for baseball fields (artificial turf)	93		
Top-dressing sand for golf courses	91		
Top-dressing sand for natural grass	92		
True Colors -fill sand	129		
Underfloor heating filler LL 5500	37		
Wall surface strengthening membrane	36		
Water bar for thin plaster applications	78		
Waterproofing accessories FS	47		
Waterproofing accessories VE	48		
Waterproofing compound	43		
Waterproofing compound WS	43		
Waterproofing strip	45		
Ventilation profile for board plastering	76		
Vertical-joint concrete PSB K30	15		
Vertical-joint concrete PSB K40	16		



Master of Materials

Fescon has been a trusted partner in the Finnish construction industry since 1984. We develop and manufacture high-quality mortar, sand, and coating products in Finland.

www.fescon.fi



Mortars

- Mortars and concretes
- Rendering and repair mortars
- Facade paints and coatings
- Wall and floor leveling compounds
- Waterproofing products and tile adhesives
- Floor hardeners and hard concrete products



Sands

- Power plant materials
- Blasting materials
- Water filtration sands
- Sports and recreational sands
- Sands for landscaping and yard construction



Coatings

- Nanten coatings
- Fintex paints
- Adhesives
- Joint compounds
- Fiberglass wallpapers

Fescon Oy

Hämeenkatu 9, 05800 Hyvinkää

tel. +358 20 789 5900

fescon@fescon.fi

www.fescon.fi

Factories: Hyvinkää | Harjavalta | Kangasala | Oulu | Raahel | Tuusula

