


Hämeenkatu 9  
05800 HYVINKÄÄ  
Tel. 020 789 5900  
[www.fescon.fi](http://www.fescon.fi)

Updated 5.5.2023 Printed 29.3.2024

## SEPARATION FABRIC 1.5X50 M

### Product description

Breathable Separation fabric for separating floating floor structures, if the base is of weak concrete, a floor base, or insulation. Diffusion open, separation fabric, made of polypropylene, through which the water in the floor levelling compound cannot penetrate. Both long sides of the separation fabric have an overlapping tape ready-fitted, overlapping according to alignment lines.

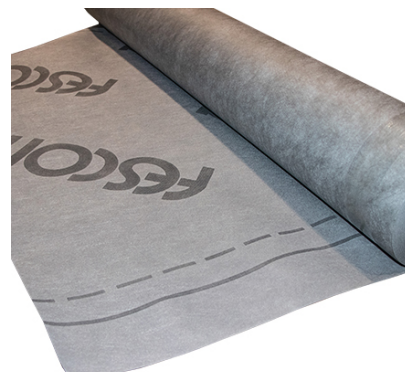

### Waste handling

Storage and handling of waste

See the separate storage and disposal instructions <https://www.fescon.fi/en/material-bank>

Hämeenkatu 9  
05800 HYYVINKÄÄ  
Tel. 020 789 5900  
[www.fescon.fi](http://www.fescon.fi)

Updated 5.5.2023 Printed 29.3.2024

## Technical information

<b>Colour</b>	brown
<b>Package size</b>	roll size 1.5 x 50 m
<b>Storage</b>	cool, not less than +6°C, protected from light
<b>Usage temperature</b>	+10°C...+30°C (base structure and indoor temperature)
<b>Weight</b>	weight per square metre: 135 gr / m <sup>2</sup>