

Hämeenkatu 9  
05800 HYVINKÄÄ  
Tel. 020 789 5900  
www.fescon.fi


## WALL SURFACE STRENGTHENING MEMBRANE

### Product description

Surface reinforcement fabric for reinforcing screed surfaces of walls. Roll size 1.0 m x 50 m.

### Applications

- Strengthening the surface screed layers of block and brick walls indoors and preventing cracking.

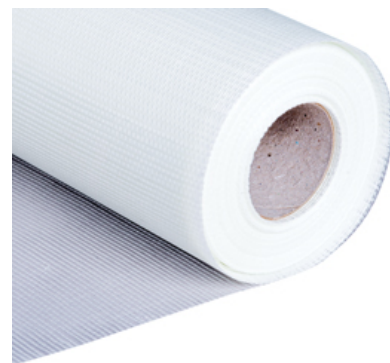

### Instructions

### Pre-treatment

The surface to be strengthened must be clean and dry. Any holes and cracks are filled in with a suitable plaster. If necessary, the entire substrate is filled over

### Attachment

The best result for the base to be levelled is obtained by fixing the reinforcing fabric with screed mass. First, a layer of screed mass and the reinforcing fabric of the wall surface is pressed onto it with a spatula. The seams of the fabric are overlapped with each other by 10cm. The second layer of screed mass is applied on top of the hardened base screed layer.

We do not recommend the use of ordinary glue or paint to attach the strengthening membrane if the plan is to apply finishing plaster on it. This is because the layer of finishing plaster may moisten the glue surface, causing the strengthening membrane to come off the substrate.

### Waste handling

Storage and handling of waste

See the separate storage and disposal instructions <https://www.fescon.fi/en/material-bank>

Hämeenkatu 9  
05800 HYVINKÄÄ  
Tel. 020 789 5900  
www.fescon.fi

## Technical information

<b>Package size</b>	1.0 m x 50 m/roll
<b>Opening size</b>	2 x 1,5 mm
<b>Weight</b>	4.06 kg/roll, 58 g/m <sup>2</sup>
<b>Size</b>	1.0 x 50 m

Limitation of liability, product use notes and restrictions: Please familiarize yourself with Fescon Oy's general terms of delivery and the design and work instructions related to the product.