
Hämeenkatu 9
05800 HYVINKÄÄ
Tel. 020 789 5900
www.fescon.fi

FIBREGLASS MESH

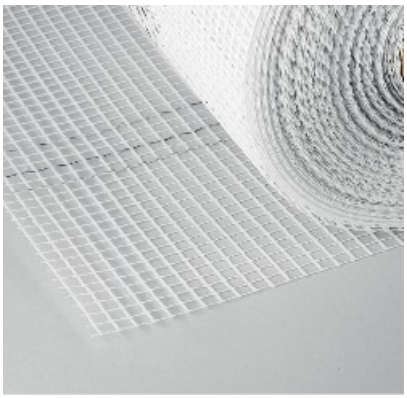

Product description

Alkali-protected fibreglass mesh for indoor and outdoor use. 7 mm x 7 mm, width 1000 mm. Alkali-protected. One roll contains 50 m^2.

Applications

- For the reinforcement of the plastered surface in the thin-layer plastering of wall surfaces
- Reinforcement of floor levelling compounds

Instructions

Base

The base must be sufficiently sturdy and firm remove any unevenness and cement paste before beginning meshing work.

Work instructions

Spread the Reinforcing Mortar evenly over the entire surface, press the fibreglass mesh into the wet mortar with a 10 cm overlap, and level the surface. During work, ensure that the mesh is fully embedded in the mortar layer. Around openings, we recommend diagonal meshing using strips cut from fibreglass mesh. In corners, use Fescon corner beads (alternatively, fold the fibreglass mesh around corners and window frames).

Waste handling

Storage and handling of waste
See the separate storage and disposal instructions https://www.fescon.fi/en/material-bank

Hämeenkatu 9
05800 HYVINKÄÄ
Tel. 020 789 5900
www.fescon.fi

Technical information

Tensile strength	1750 / 5 cm (DIN EN ISO 13934-1 N/5cm)
Opening size	7 mm x 7 mm, width 1000 mm
Weight	165 kg/m^2
Size	50 m^2

Limitation of liability, product use notes and restrictions: Please familiarize yourself with Fescon Oy's general terms of delivery and the design and work instructions related to the product.